

tGW-700 Series

User Manual



Warranty

All products manufactured by ICP DAS are warranted against defective materials for a period of one year from the date of delivery to the original purchaser.

Warning

ICP DAS assumes no liability for damages resulting from the use of this product. ICP DAS reserves the right to change this manual at any time without notice. The information published by ICP DAS is believed to be accurate and reliable. However, no responsibility is assumed by ICP DAS for its use, nor for any infringements of patents or other rights of third parties resulting from its use.

Copyright

Copyright © 2010 by ICP DAS Co., Ltd. All rights are reserved.

Trademarks

Names are used for identification only and may be registered trademarks of their respective companies.

Table of Contents

PACKING LIST.....	5
MORE INFORMATION.....	5
1. INTRODUCTION.....	6
1.1 WHY ETHERNET SOLUTIONS?	7
1.2 WHY WEB SERVER TECHNOLOGY?	8
2. HARDWARE INFORMATION.....	9
2.1 SPECIFICATIONS.....	9
2.2 FEATURES	10
2.3 SELECTION GUIDE.....	10
2.4 TGW-700 FRONT VIEW	11
2.5 DIMENSIONS.....	13
2.6 PIN ASSIGNMENTS.....	15
2.6.1 tGW-712 Pin Assignments.....	15
2.6.2 tGW-722 Pin Assignments.....	16
2.6.3 tGW-732 Pin Assignments.....	17
2.6.4 tGW-715 Pin Assignments.....	18
2.6.5 tGW-725 Pin Assignments.....	19
2.6.6 tGW-735 Pin Assignments.....	20
2.6.7 tGW-718 Pin Assignments.....	21
2.7 WIRING NOTES.....	22
2.7.1 RS-232 Wiring Connections.....	22
2.7.1 RS-422 Wiring Connections.....	23
2.7.2 RS-485 Wiring Connections.....	23
3. SETTING UP THE TGW-700 MODULE	24
STEP 1: CONNECTING THE POWER AND HOST PC	24
STEP 2: INSTALLING THE MODBUS UTILITY AND eSEARCH UTILITY.....	25
STEP 3: SEARCH FOR THE TGW-700 ON THE ETHERNET NETWORK	26
STEP 4: TESTING YOUR TGW-700.....	27
4. TYPICAL APPLICATIONS FOR THE TGW-700	31
4.1 MODBUS GATEWAY	31


4.2 PAIR-CONNECTION APPLICATIONS.....	32
STEP 1: CONNECTING TO A NETWORK, PC AND POWER	33
STEP 2: CONFIGURING ETHERNET SETTINGS.....	34
STEP 3: CONFIGURING PAIR-CONNECTION ON TGW-700 #1 WEB SERVER	34
STEP 4: CONFIGURING PAIR-CONNECTION ON TGW-700 #2 WEB SERVER	36
STEP 5: TESTING PAIR-CONNECTION FUNCTION.....	37
5. WEB CONFIGURATION	39
5.1 LOGGING IN TO THE TGW-700 WEB SERVER.....	39
5.2 HOME PAGE.....	41
5.3 NETWORK SETTING.....	42
5.3.1 Network and Miscellaneous Settings	42
5.3.2 IP Address Selection	42
5.3.3 General Configuration Settings.....	45
5.3.4 Restore Factory Defaults.....	46
5.4 SERIAL PORT SETTINGS	47
5.4.1 Port1 Settings.....	47
5.4.2 Port Settings.....	47
5.4.3 Pair-Connection Settings.....	48
5.5 CHANGE PASSWORD.....	49
5.6 LOGOUT.....	49
APPENDIX: GLOSSARY.....	50
1. ARP (ADDRESS RESOLUTION PROTOCOL)	50
2. CLIENTS AND SERVERS	50
3. ETHERNET.....	51
4. FIRMWARE.....	51
5. GATEWAY.....	51
6. ICMP (INTERNET CONTROL MESSAGES PROTOCOL)	51
7. INTERNET	51
8. IP (INTERNET PROTOCOL) ADDRESS.....	51
9. MAC (MEDIA ACCESS CONTROL) ADDRESS.....	52
10. PACKET.....	52
11. PING	52
12. RARP (REVERSE ADDRESS RESOLUTION PROTOCOL)	52
13. SOCKET	52
14. SUBNET MASK	53
15. TCP (TRANSMISSION CONTROL PROTOCOL)	53

16. TCP/IP.....	53
17. UDP (USER DATAGRAM PROTOCOL)	53
APPENDIX: FAQ	54
1. HOW TO AVOID A BROWSER ACCESS ERROR THAT CAUSES A BLANK PAGE TO BE DISPLAYED WHEN USING IE.	54
2. HOW TO ACCESS A REMOTE tGW-700 THAT IS LOCATED PLACED BEHIND AN NAT OR A FIREWALL.	56
3. WHY DOES THE tGW-700 SERIES MODULE FAIL ON A (PUBLIC) INTERNET CONNECTION?	57

Packing List

The shipping package includes the following items:

- One tGW-700 series hardware module
- One printed Quick Start Guide
- One software utility CD



Note

If any of these items are missing or damaged, please contact the local distributor for more information. Save the shipping materials and cartons in case you want to ship the module in the future.

More Information

Documentation

CD:\NAPDOS\tGW-700\Document

<http://ftp.icpdas.com/pub/cd/tinymodules/napdos/tgw-700/document/>

Firmware

CD:\NAPDOS\tGW-700\Firmware

<http://ftp.icpdas.com/pub/cd/tinymodules/napdos/tgw-700/firmware/>

Software


CD:\NAPDOS\Software

<http://ftp.icpdas.com/pub/cd/tinymodules/napdos/software/>

1. Introduction

Modbus has become a de facto standard industrial communication protocol, and is now the most commonly available means of connecting industrial electronic devices. Modbus allows for communication between many devices connected to the same RS-485 network, for example, a system that measures temperature and humidity and communicates the results to a computer. Modbus is often used to connect a supervisory computer with a remote terminal unit (RTU) in supervisory control and data acquisition (SCADA) systems.

The tGW-700 module is a Modbus TCP/UDP to RTU/ASCII gateway that enables a Modbus/TCP host to communicate with serial Modbus RTU/ASCII devices through an Ethernet network, and eliminates the cable length limitation of legacy serial communication devices. The module can be used to create a pair-connection application (as well as serial-bridge or serial-tunnel application), and can then route data over TCP/IP between two serial Modbus RTU/ASCII devices, which is useful when connecting mainframe computers, servers or other serial devices that use Modbus RTU/ASCII protocols and do not themselves have Ethernet capability.

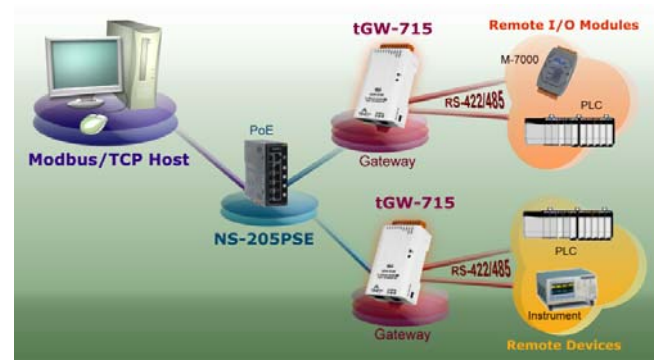

The tGW-700 module features a powerful 32-bit MCU to enable efficient handling of network traffic, and also has a built-in web server that provides an intuitive web management interface that allows users to modify the configuration of the module, including the DHCP/Static IP, the gateway/mask settings and the serial port settings



The tGW-700 module offers true IEEE 802.3af-compliant (classification, Class 1) Power over Ethernet (PoE) functionality using a standard category 5 Ethernet cable to receive power from a PoE switch such as the NS-205PSE. If there is no PoE switch on site, the module will also accept power input from a DC adapter. The tGW-700 module is designed for ultra-low power consumption, reducing hidden costs from increasing fuel and electricity prices, especially when you have a large number of modules installed. Reducing the amount of electricity consumed by choosing energy-efficient equipment can have a positive impact on maintaining a green environment.


1.1 Why Ethernet Solutions?

Nowadays, the Ethernet protocol has become the de-facto standard for local area networks. Connectivity via the Internet is becoming common in many applications from home appliances, to vending machines, to testing equipment, to UPS, etc. An Ethernet network can link office automation and industrial control networks, access remote systems and share data and information between multivendor machines, and it also provides a cost-effective solution for industrial control networks.



1.2 Why Web Server Technology?

Web server technology enables configuration of the tGW-700 via a standard web browser interface, e.g. Internet Explorer, Firefox or Mozilla, etc. This means that it is easy to check the configuration of the tGW-700 via an Ethernet network without needing to install any other software tools, thereby reducing the user's learning curve.

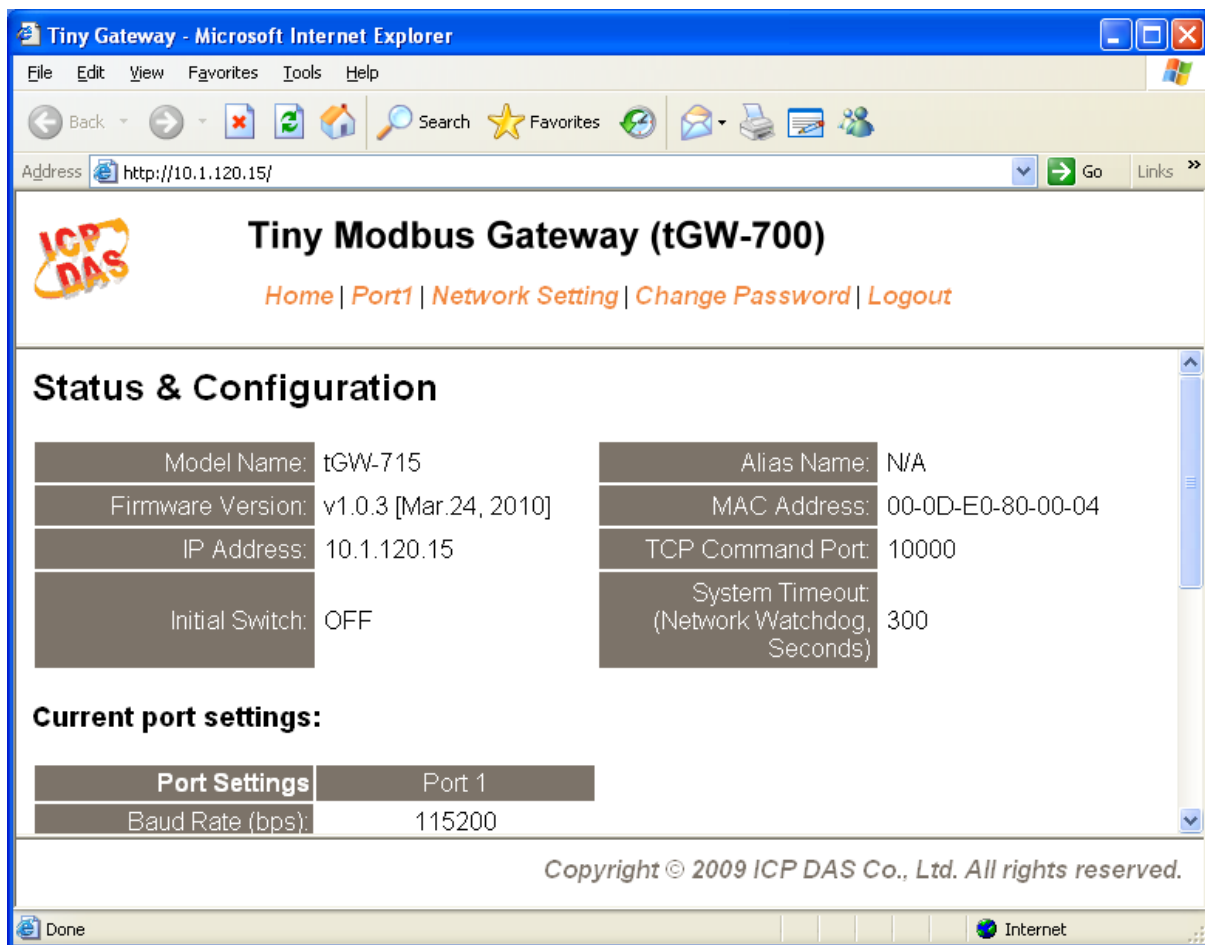

2. Hardware Information

2.1 Specifications

Model	tGW-712	tGW-722	tGW-732	tGW-715	tGW-725	tGW-735	tGW-718
System							
CPU	32-bit ARM						
Communication Interface							
Ethernet	10/100 Base-TX, 8-pin RJ-45 x 1, (Auto-negotiating, Auto-MDI/MDIX, LED indicator) PoE (IEEE 802.3af, Class 1)						
COM1	5-wire RS-232	5-wire RS-232	3-wire RS-232	2-wire RS-485 4-wire RS-422	2-wire RS-485	2-wire RS-485	3-wire RS-232
							2-wire RS-485 4-wire RS-422
COM2	-	5-wire RS-232	3-wire RS-232	-	2-wire RS-485	2-wire RS-485	-
COM3	-	-	3-wire RS-232	-	-	2-wire RS-485	-
Self-Tuner	-			Yes, automatic RS-485 direction control			
UART	16c550 or compatible						
COM Port Format							
Baud Rate	115200 bps Max.						
Data Bit	5, 6, 7, 8						
Parity	None, Odd, Even, Mark, Space						
Stop Bit	1, 2						
General							
Power Input	PoE: IEEE 802.3af, Class 1 DC jack: +12 ~ 48 V _{DC}						
Power Consumption	0.05 A @ 24 V _{DC}						
Connector	Male DB-9 x1	10-Pin Removable Terminal Block x 1					
Installation	DIN-Rail mounting						
Flammability	Fire Retardant Materials (UL94-V0 Level)						
Operating Temperature	-25° ~ 75°C						
Storage Temperature	-30° ~ 80°C						
Humidity	10 ~ 90% RH, non-condensing						


2.2 Features

- Cost-effective Modbus/TCP to RTU/ASCII Gateway
- Supports Modbus/TCP master and slave
- Supports Modbus RTU/ASCII master and slave
- Contains a 32-bit MCU that efficiently handles network traffic
- 10/100 Base-TX Ethernet, RJ-45 x1
(Auto-negotiating, auto MDI/MDIX, LED Indicators)
- Redundant power inputs: PoE (IEEE 802.3af, Class 1) and DC jack
- Includes redundant power inputs: PoE and DC jack
- Allows automatically RS-485 direction control
- Supports TCP, UDP, HTTP, DHCP, BOOTP and TFTP protocols
- Supports UDP responder for device discovery
- Allows easy firmware updates via the Ethernet
- Tiny Built-in Web server for easy configuration
- Tiny form-factor and low power consumption
- RoHS compliant with no Halogen
- Made from fire retardant materials (UL94-V0 Level)

2.3 Selection Guide


Model	CPU	Ethernet	Baud Rate	COM1	COM2	COM3
tDS-712	32-bit MCU	10/100 Base-TX, PoE	115200 bps	5-wire RS-232	-	-
tDS-722				5-wire RS-232	5-wire RS-232	-
tDS-732				3-wire RS-232	3-wire RS-232	3-wire RS-232
tDS-715				2-wire RS-485 4-wire RS-422	-	-
tDS-725				2-wire RS-485	2-wire RS-485	-
tDS-735				2-wire RS-485	2-wire RS-485	2-wire RS-485
tDS-718				3-wire RS-232	-	-
				2-wire RS-485		
				4-wire RS-422		
3-Wire RS-232: RxD, TxD, GND (Non-isolated) 5-Wire RS-232: RxD, TxD, CTS, RTS, GND (No-isolated) 2-Wire RS-485: DATA+, DATA-, GND (Non-isolated) 4-Wire RS-422: TxD+, TxD-, RxD+, RxD-, GND (Non-islated)						

2.4 tGW-700 Front View

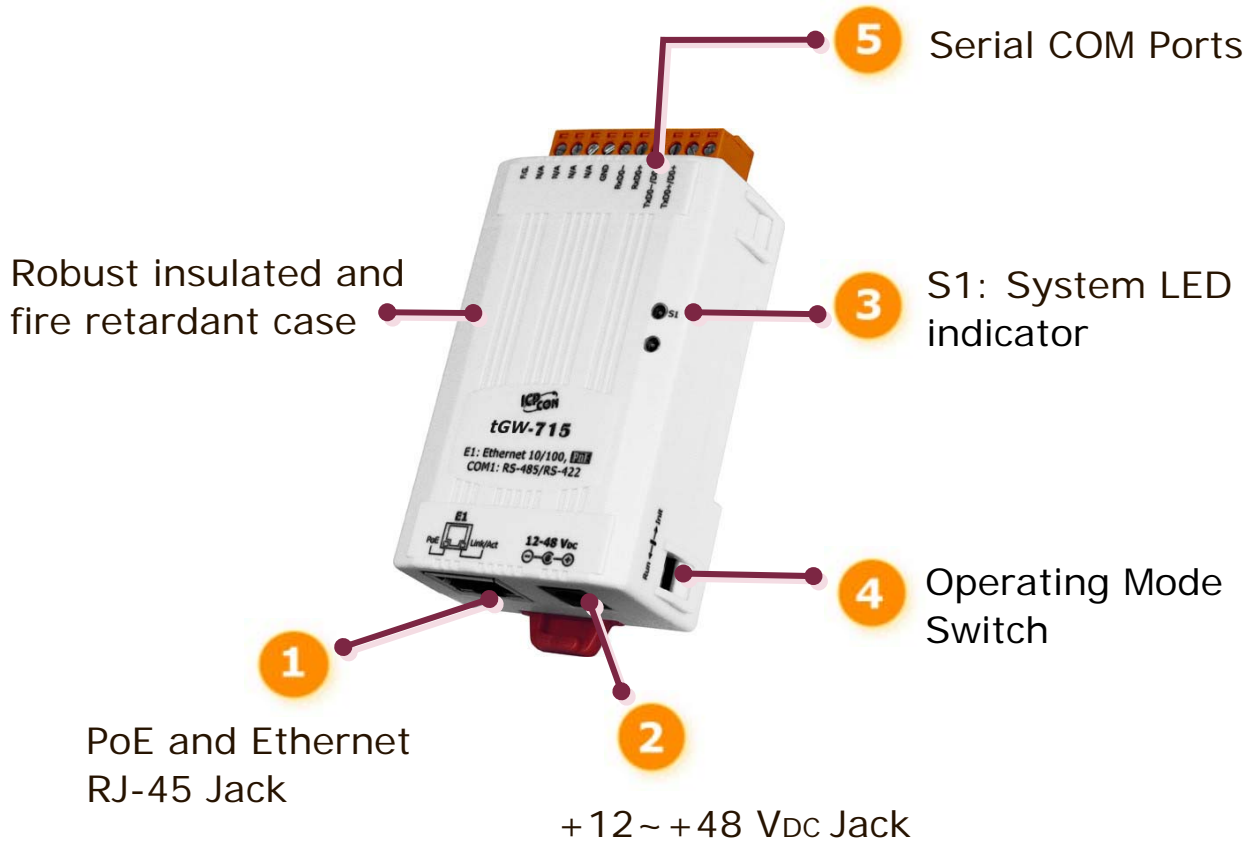


1. PoE and Ethernet RJ-45 Jack:

The tGW-700 is equipped with a RJ-45 jack that is used as the 10/100 Base-TX Ethernet port and features networking capability. When an Ethernet link is detected and an Ethernet packet is received, the **Link/Act LED (Orange)** indicator will be illuminated. When power is supplied via PoE (Power-over-Ethernet), the **PoE LED (Green)** indicator will be illuminated.

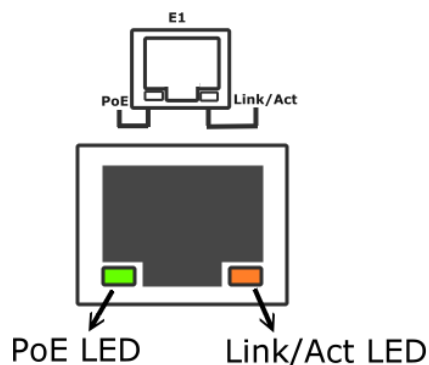

2. +12~+48 V_{DC} Jack:

The tGW-700 is equipped with a +12~+48 V_{DC} jack that is used as the power supply. If there is no PoE switch available on site, the tGW-700 will accept power input from a DC adapter.



3. S1: System LED indicator:

Once power is supplied to the tGW-700, the system LED indicator will be illuminated as follows:

Function	System LED Behavior
Running Firmware	ON
Network ready	Flashing per 3 seconds
Serial Port Busy	Flashing per 0.2 seconds

4. Operating Mode Switch:

Init Mode: Configuration mode

Run Mode: Firmware operation mode




In the tGW-700 series, the operating mode Switch is in the Run position by default. When updating the tGW-700 firmware, the switch needs to be moved from the Run position to the Init position. The Switch must be returned to the Run position after the update is complete.

5. Serial COM Ports:


The numbers of serial COM Ports depend on the types of tGW-700 modules. For more detailed information regarding the pin assignments for the Serial COM ports, please refer to Section **2.6 Pin Assignments**.

2.5 Dimensions

■ tGW-712 Dimensions:


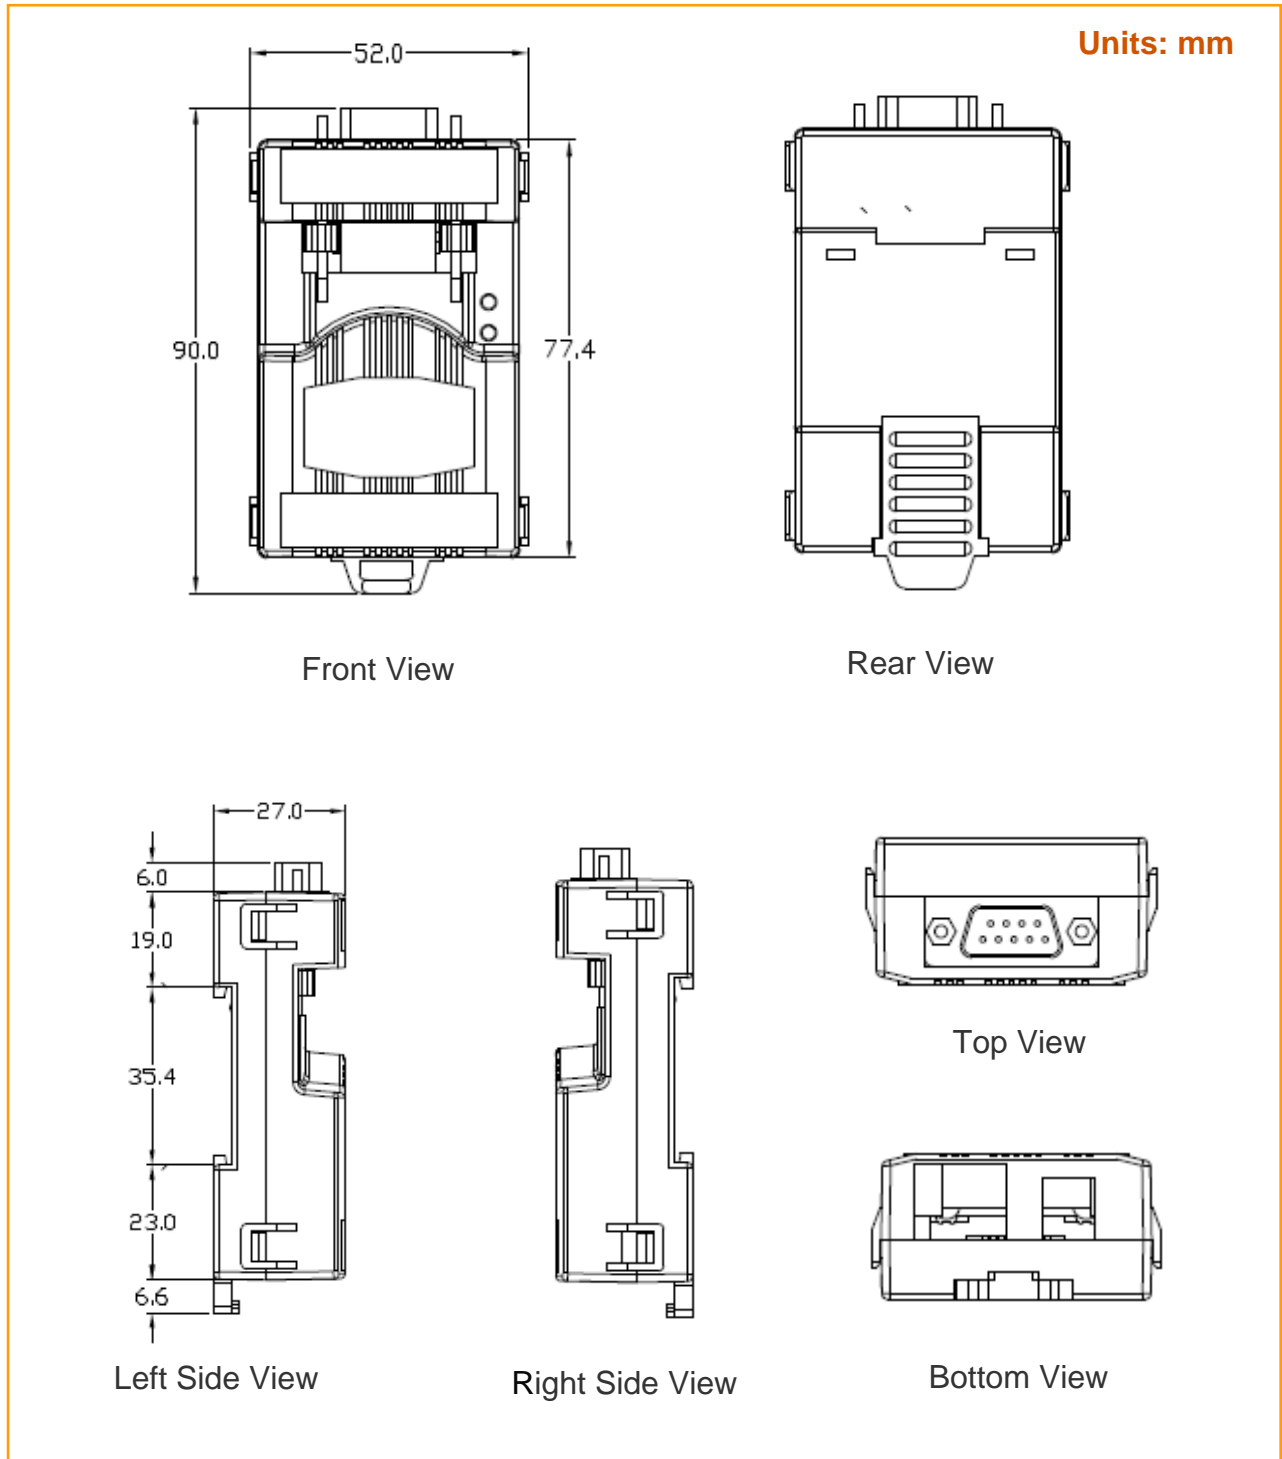


■ tGW-722, tGW-732, tGW-715, tGW-725, tGW-735 and tGW-718 Dimensions:

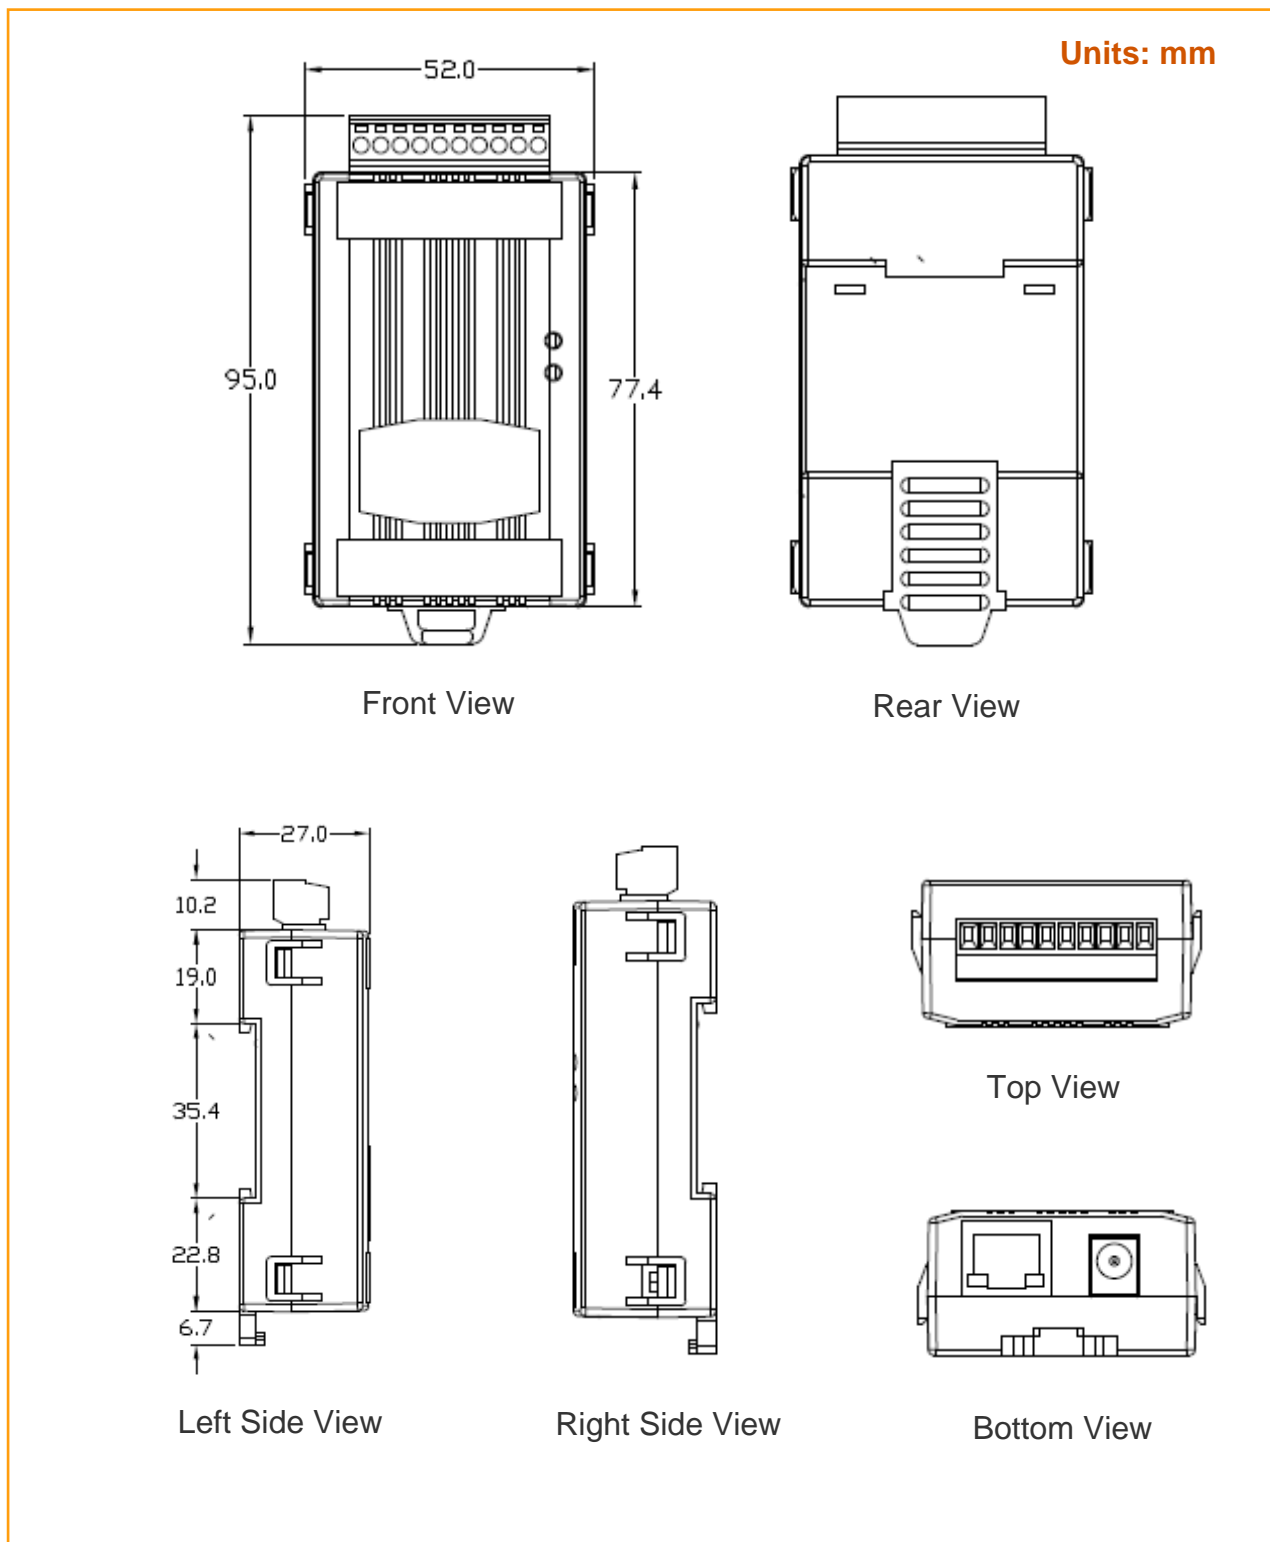

2.6 Pin Assignments



2.6.1 tGW-712 Pin Assignments 1-Port 5-wire RS-232 Module

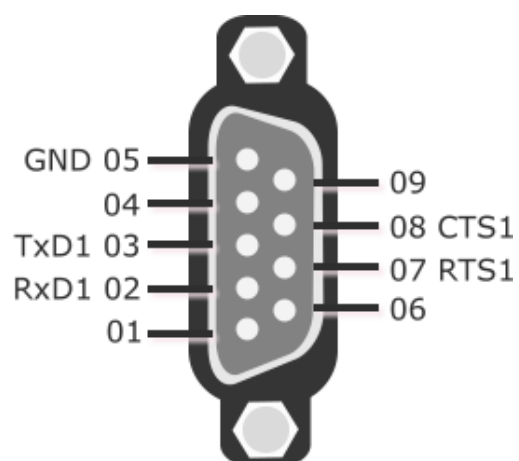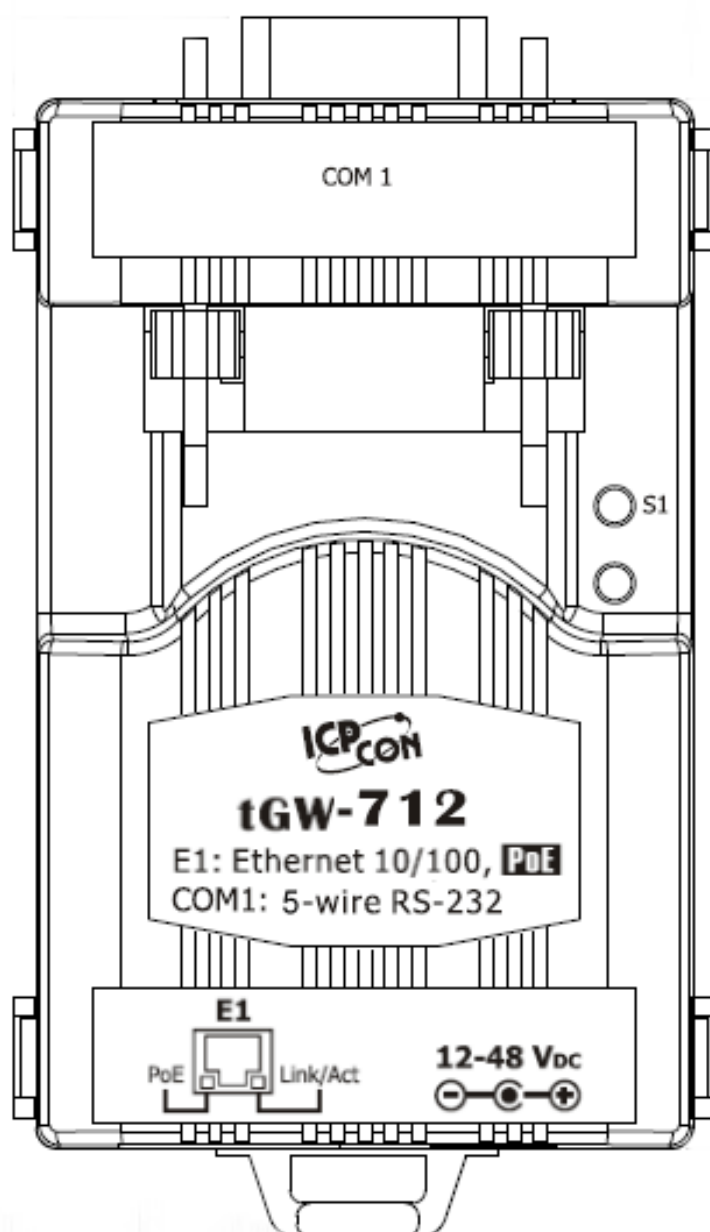

Note: The CTS/RTS pins are reserved (no function).

2.6.2 tGW-722 Pin Assignments



2-Port 5-wire RS-232 Module

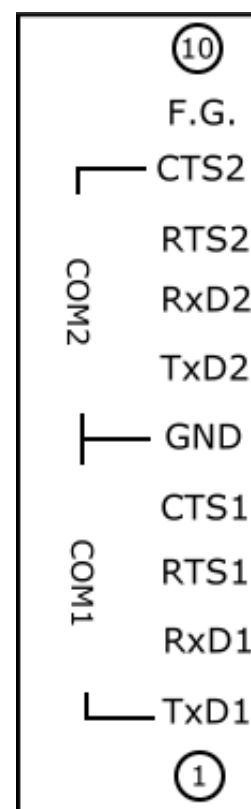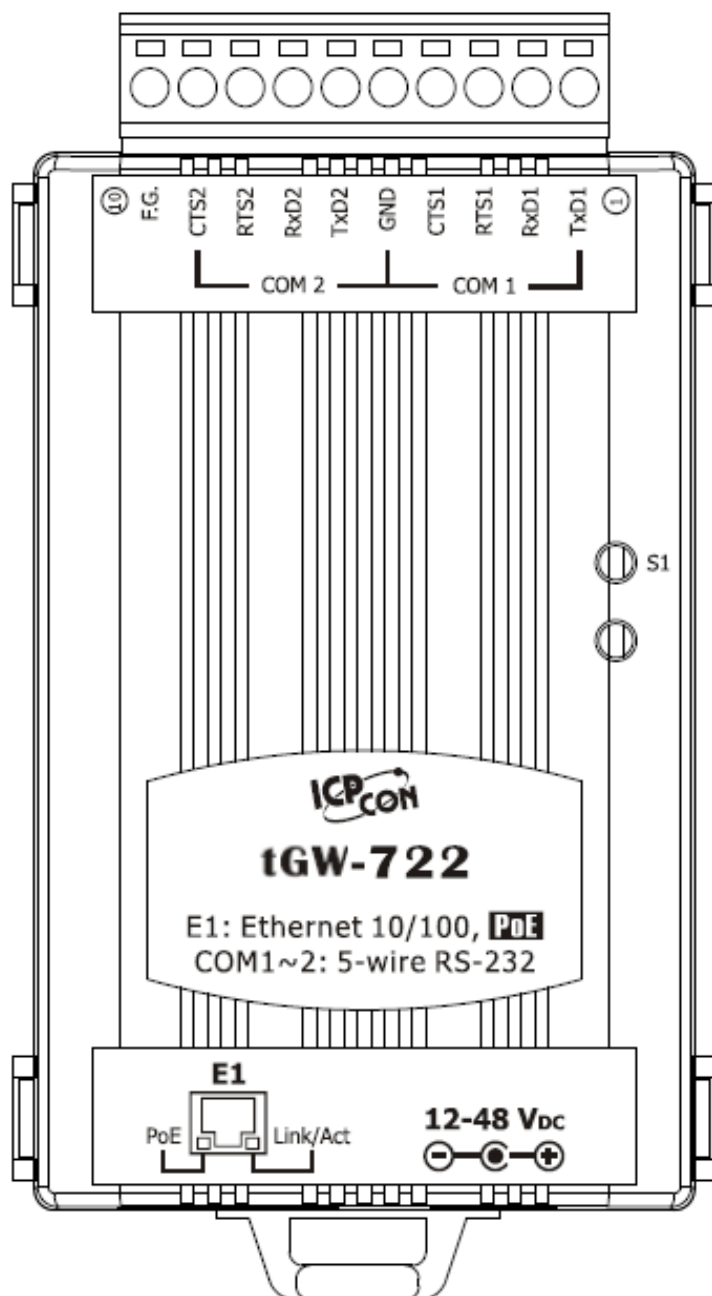

Note: The CTS/RTS pins are reserved (no function).


2.6.3 tGW-732 Pin Assignments

3-Port 3-wire RS-232 Module

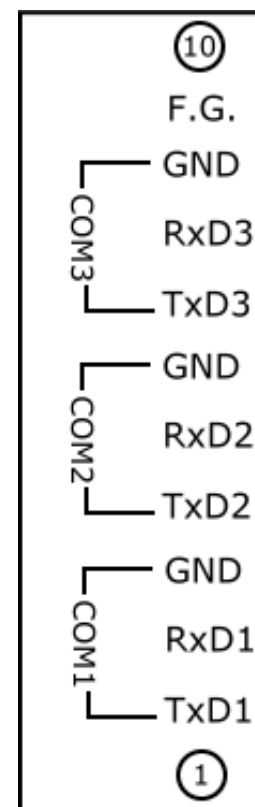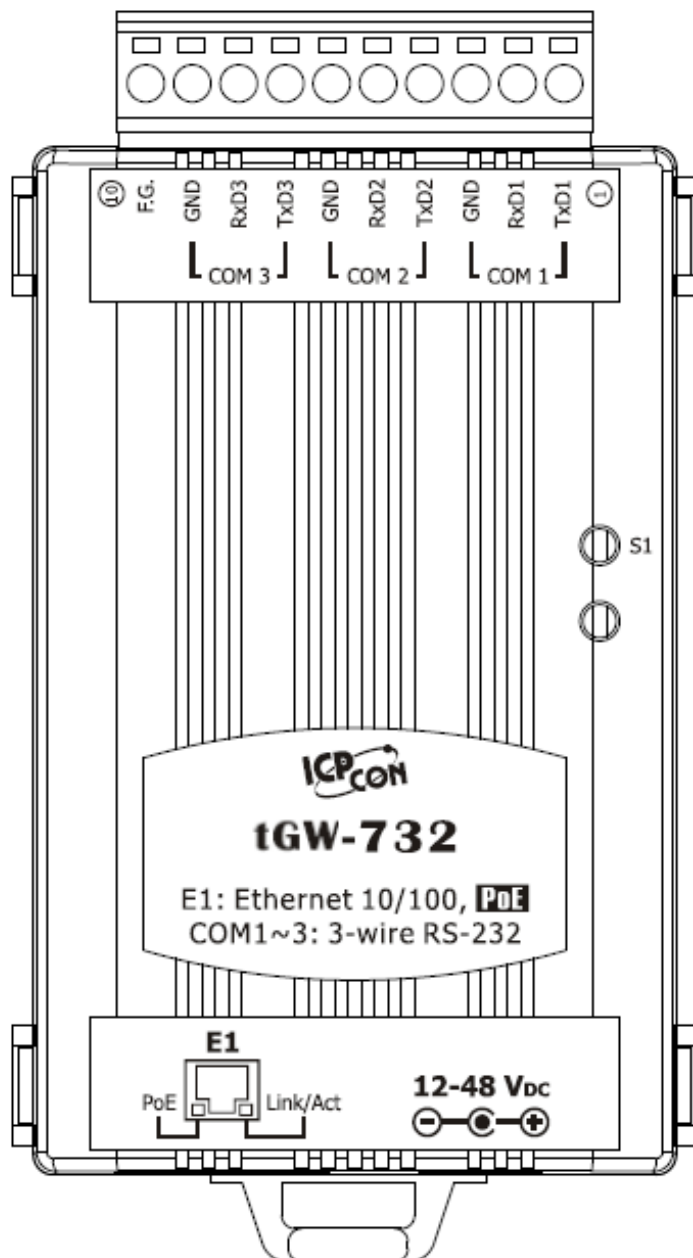


2.6.4 tGW-715 Pin Assignments

1-Port 2-wire RS-485/4-Wire RS-422 Module

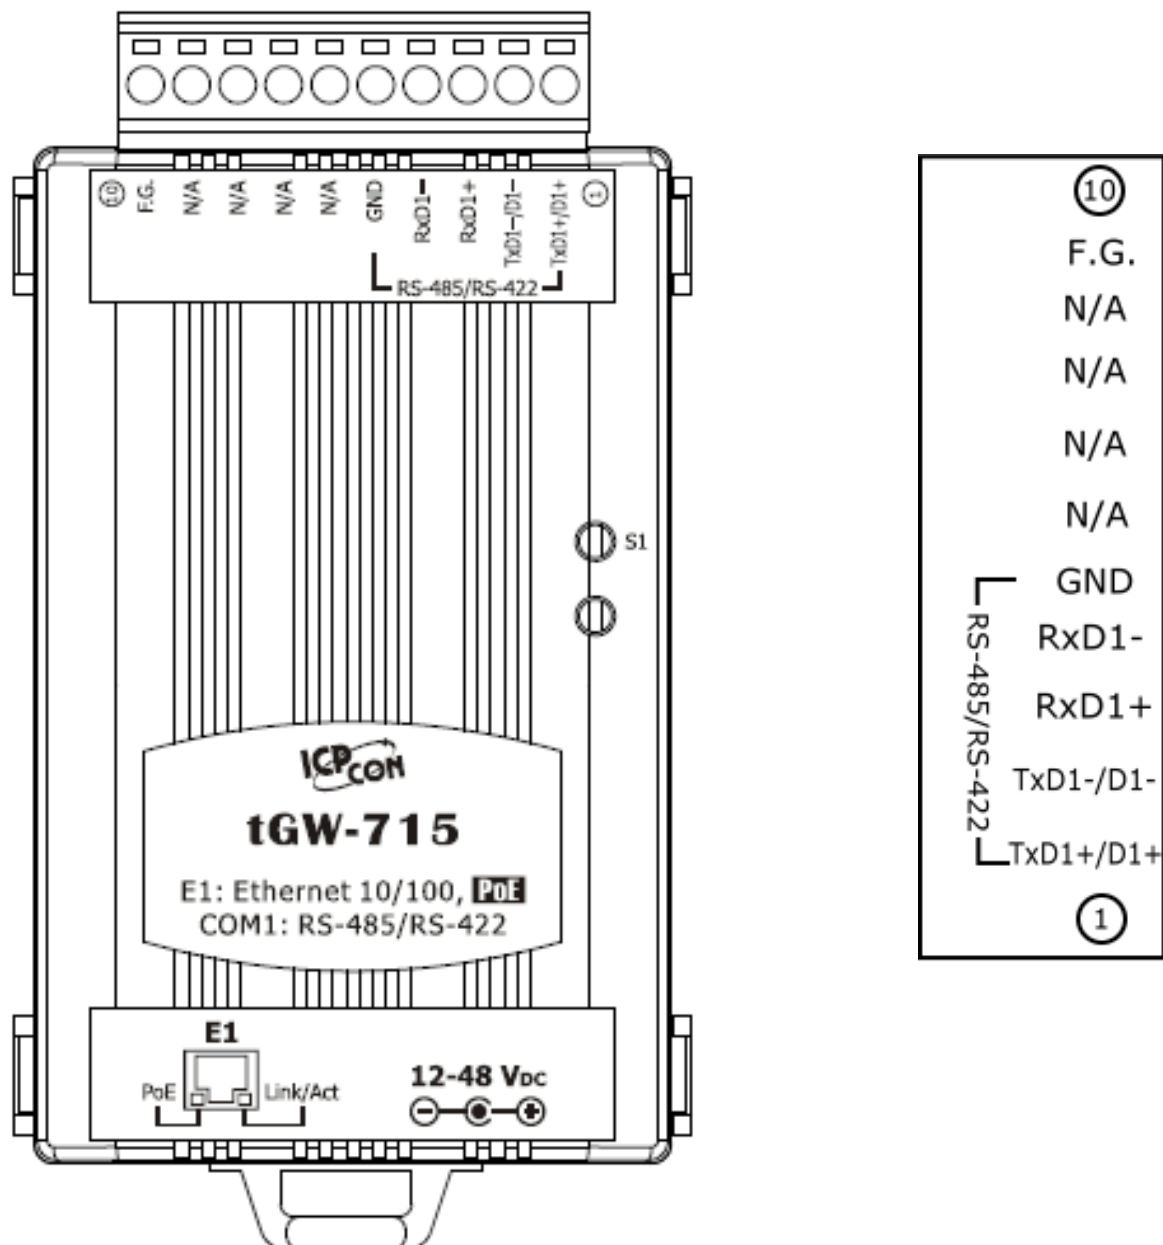



2.6.5 tGW-725 Pin Assignments

2-Port 2-wire RS-485 Module

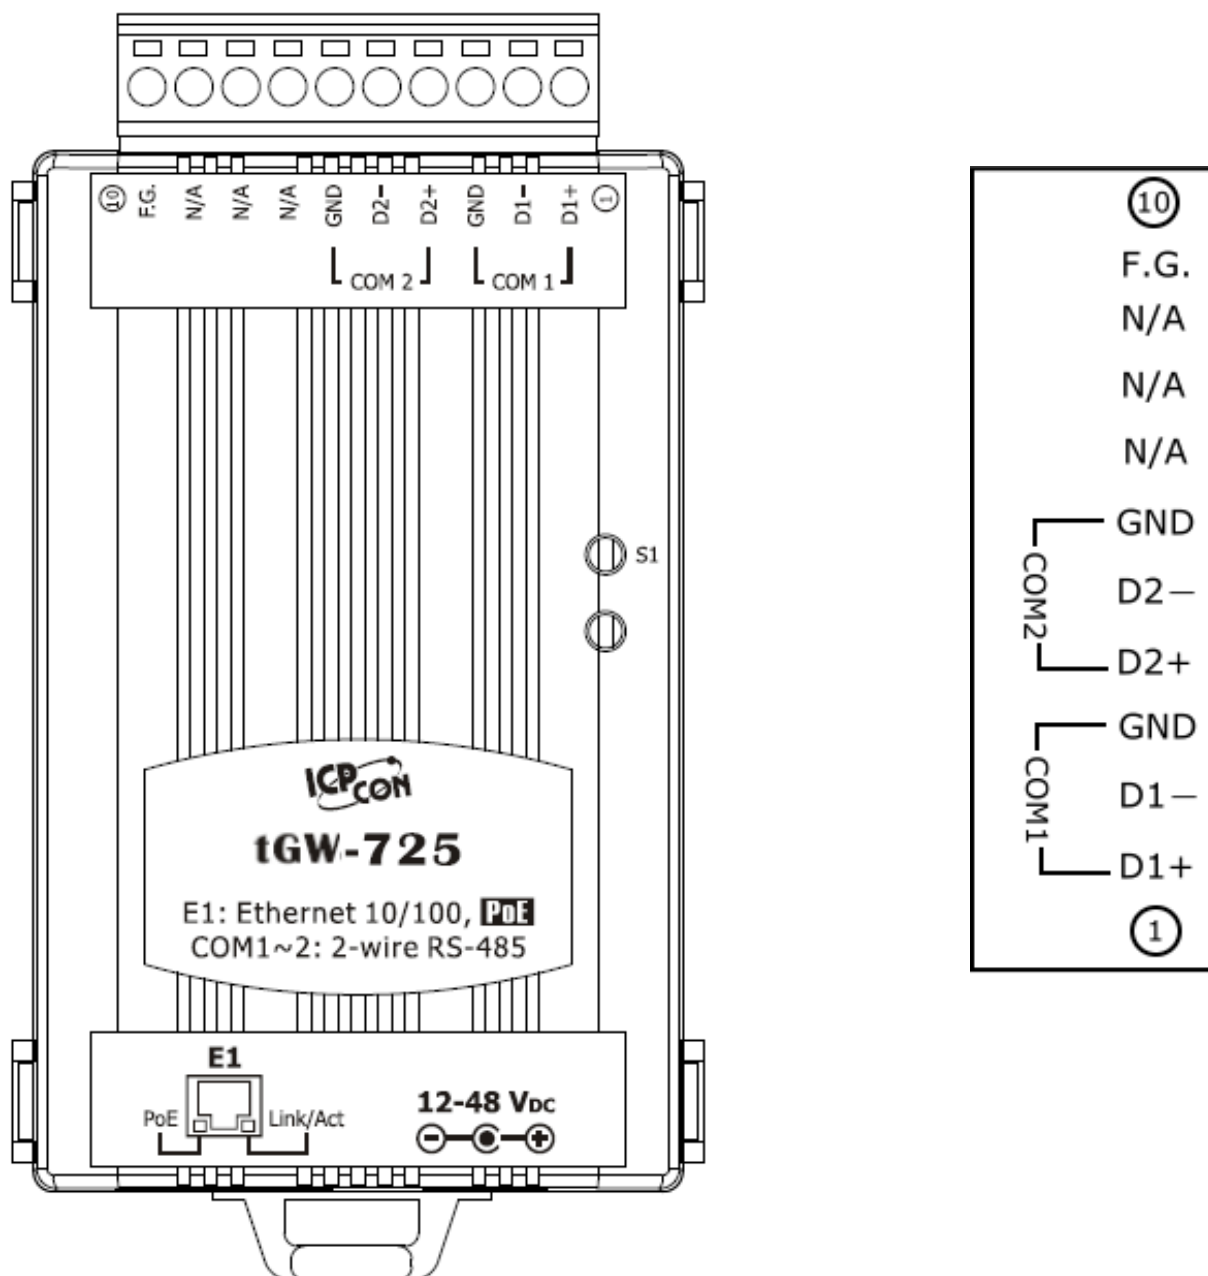


2.6.6 tGW-735 Pin Assignments

3-Port 2-wire RS-485 Module

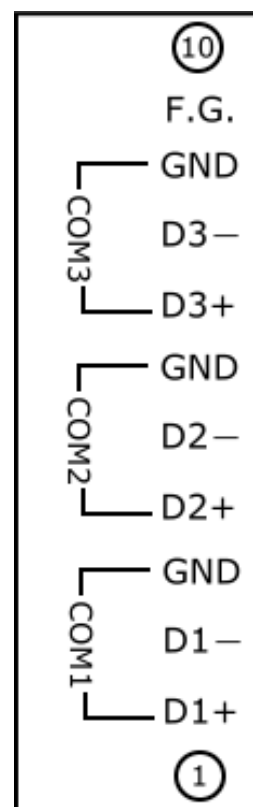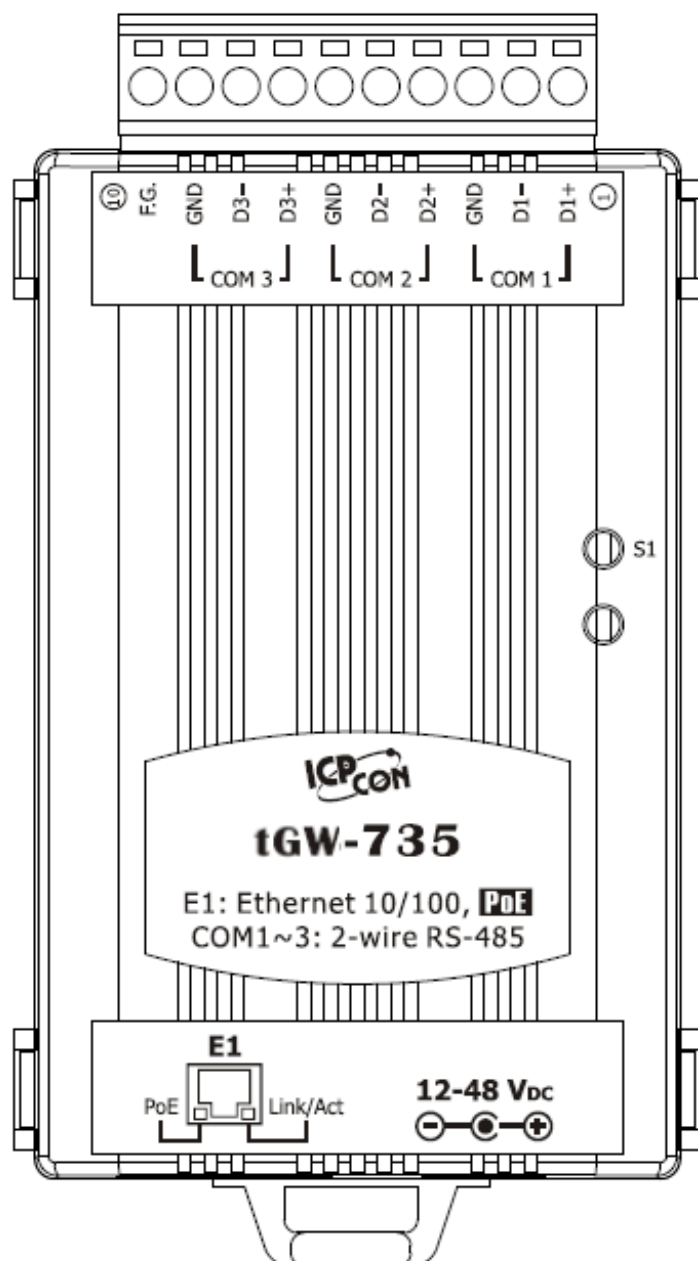

2.6.7 tGW-718 Pin Assignments


1-Port 3-Wire R232 and 2-Wire RS-485/4-Wire RS-422 Module

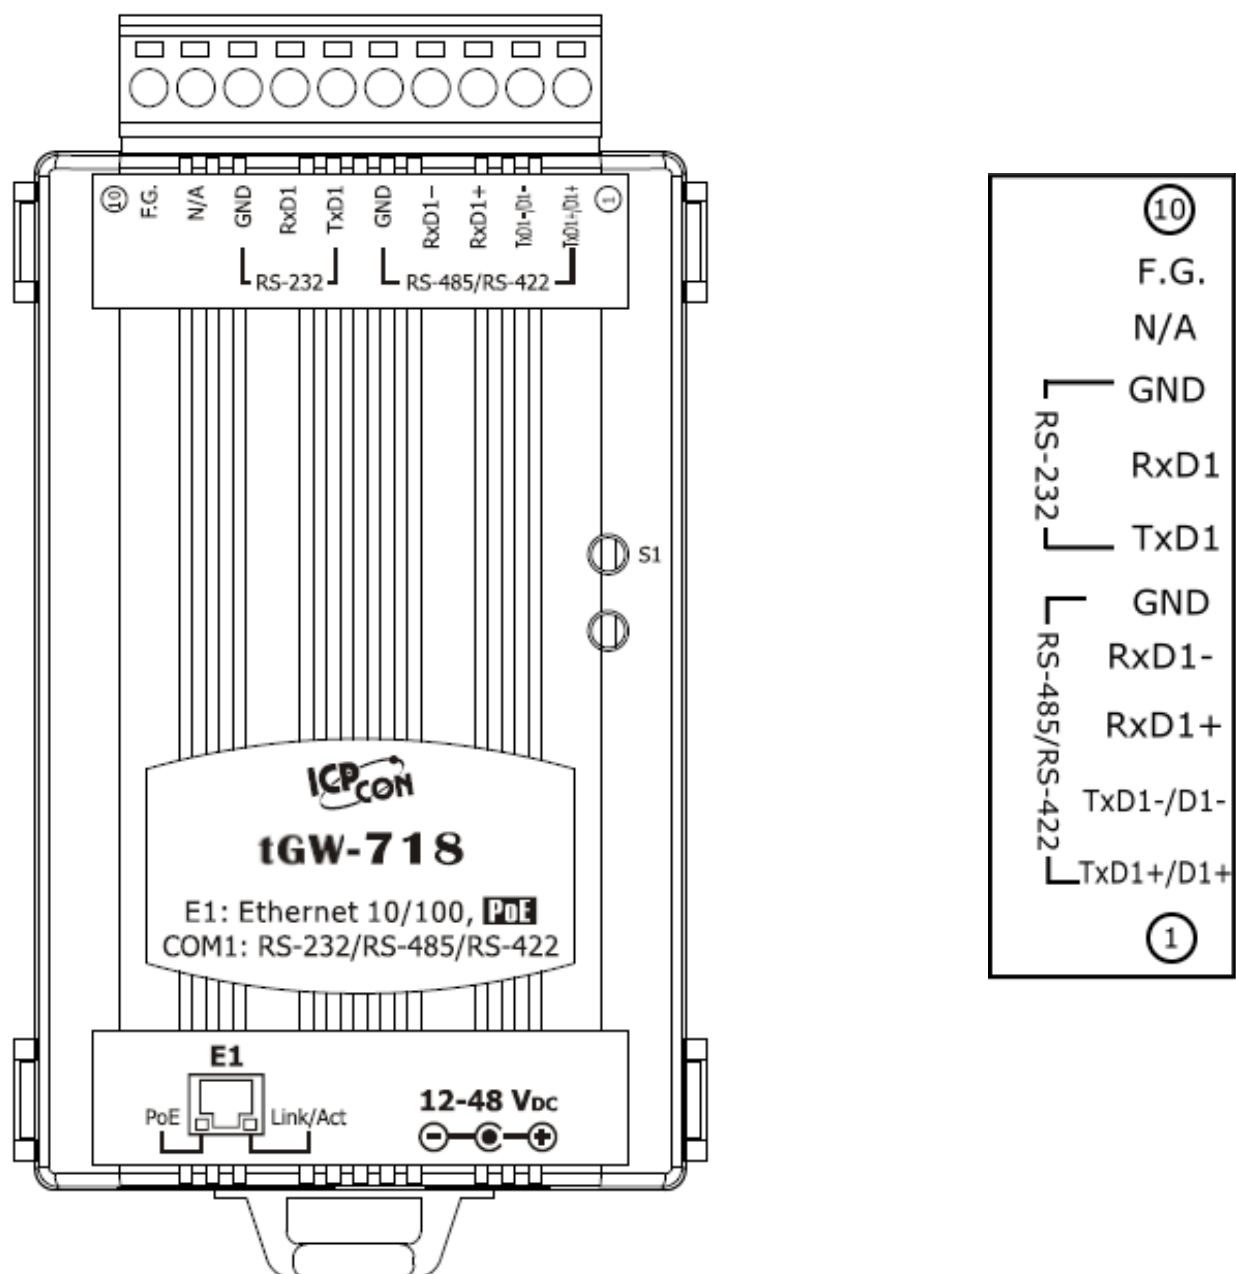


2.7 Wiring Notes

2.7.1 RS-232 Wiring Connections

5-wire RS-232 Connection (DB-9)

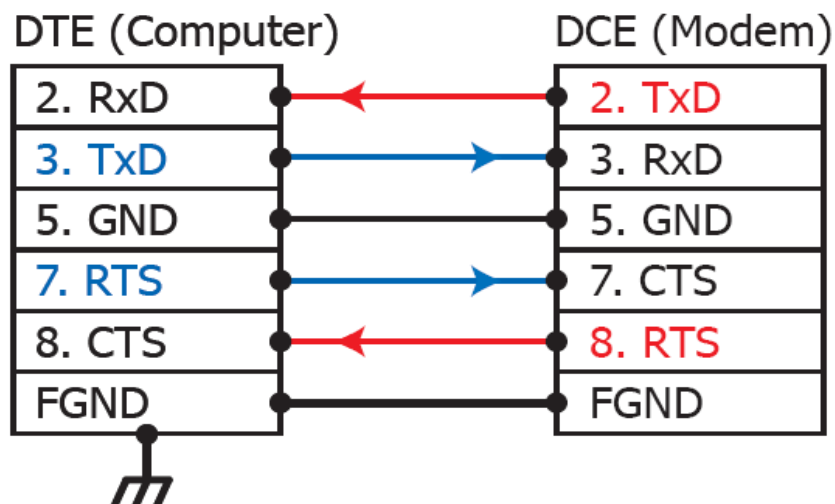

3-wire RS-232 Connection (Shorts unused signals RTS/CTS)

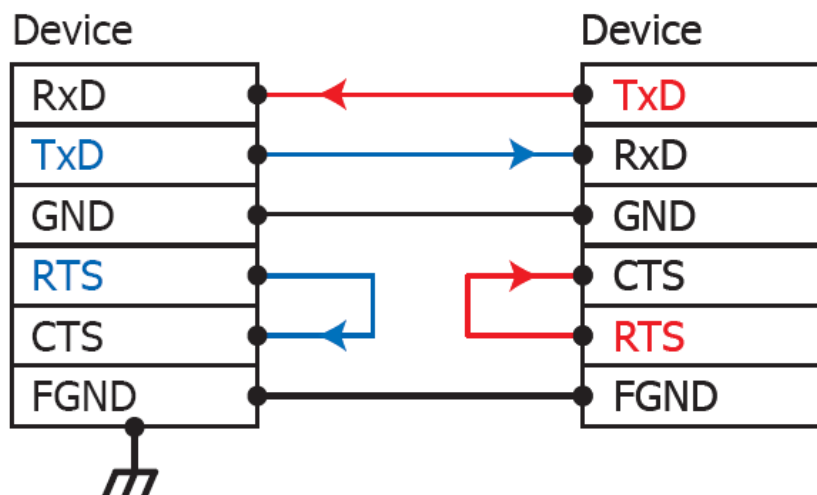


Note

1. For 3-Wire RS-232 connections, it is recommended that unused signals such as RTS/CTS and DTR/DSR are shorted, since some systems may still check the status of CTS and DSR.
2. FGND is the frame ground that is soldered to the DB9 metal-shield.


2.7.1 RS-422 Wiring Connections

4-wire RS-422 Wiring

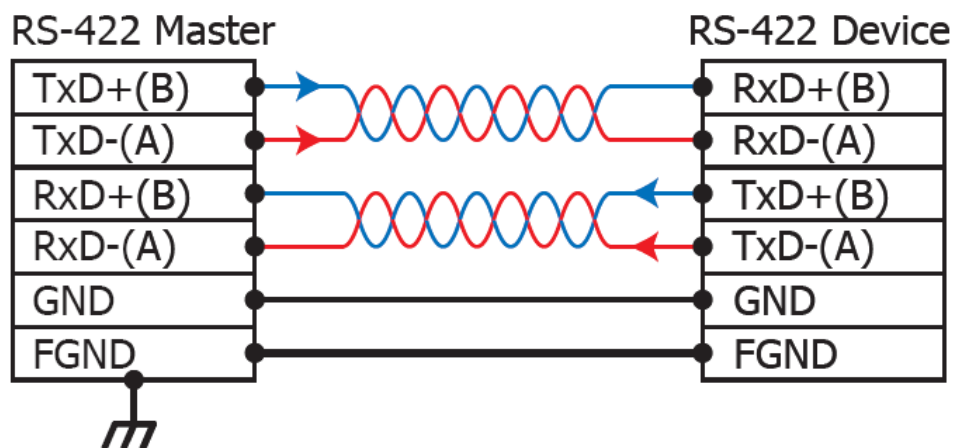

2.7.2 RS-485 Wiring Connections

2-wire RS-485 Wiring

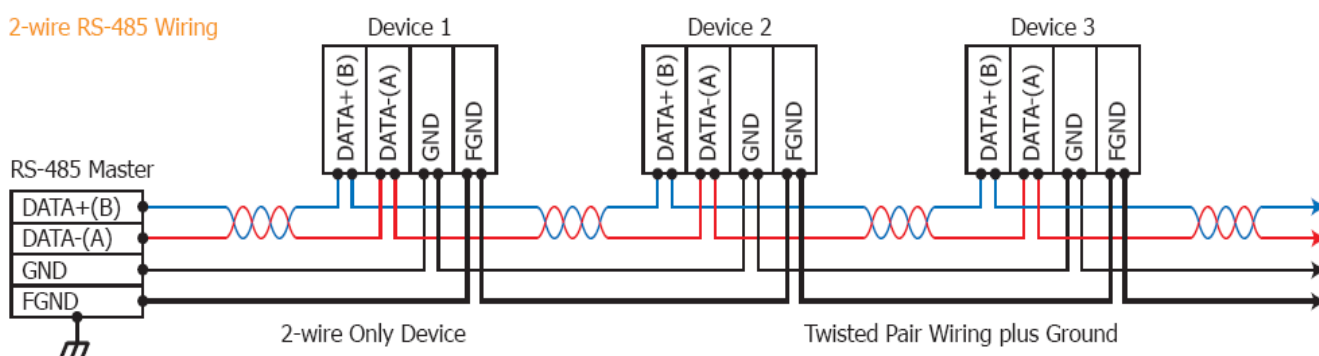

Note

You should connect all signal grounds of RS-422/485 devices together. This reduces the common-mode voltage between devices.


3. Setting up the tGW-700 module


Step 1: Connecting the power and Host PC

1. Make sure the network settings on your PC are functioning correctly.
2. Disable or correctly configure the Windows firewall and any Anti-Virus software firewall first or else the “**Search Servers**” function in the eSearch Utility may not work. (Contact your System Administrator for more details of how to do this)
3. Check Init/Run switch is on **Run** position.



4. Connect both the tGW-700 and your computer to the same sub-network or the same Ethernet Switch and power on the tGW-700.

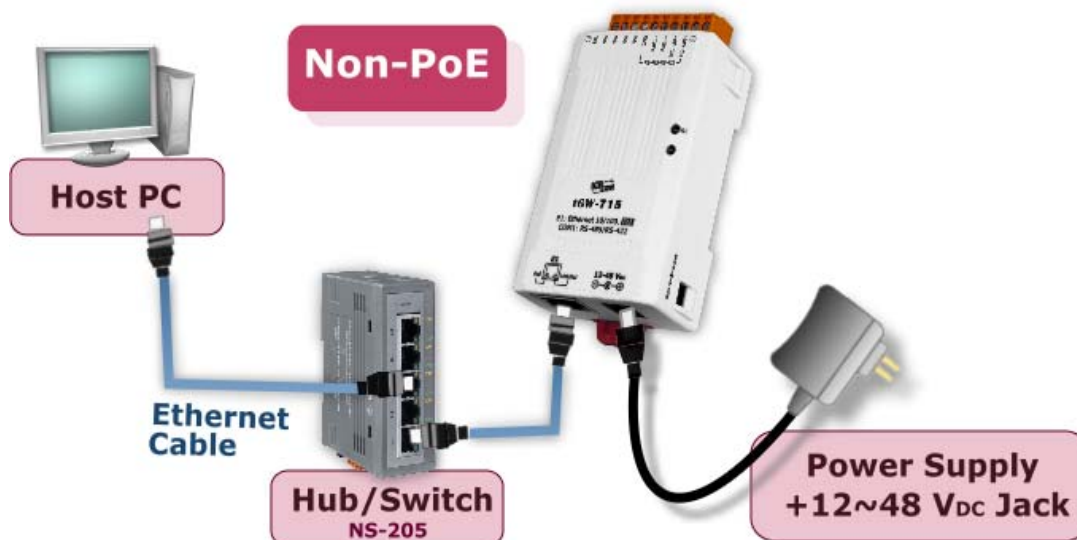

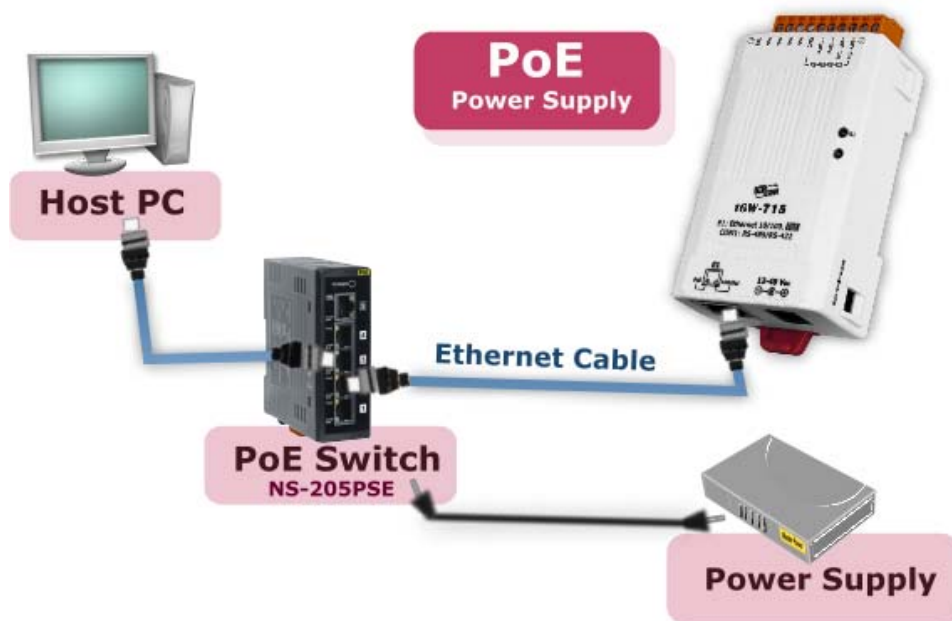

5. Make sure the System LED indicator is flashing.



Step 2: Installing the Modbus Utility and eSearch Utility

- The Modbus Utility is located at:

CD: \NAPDOS\Software\Modbus_Utility

http://ftp.icpdas.com/pub/cd/tinymodules/napdos/software/modbus_utility/

- The eSearch Utility is located at:

CD:\Napedos\software\eSearch\


<http://ftp.icpdas.com/pub/cd/tinymodules/napdos/software/esearch/>




eSearch.exe
eSearch Utility

Step 3: Search for the tGW-700 on the Ethernet network

1. Double click the eSearch Utility and click the “**Search Servers**” button to search for your tGW-700.
2. Double click the name of the tGW-700 to open the “**Configure Server**” dialog box.

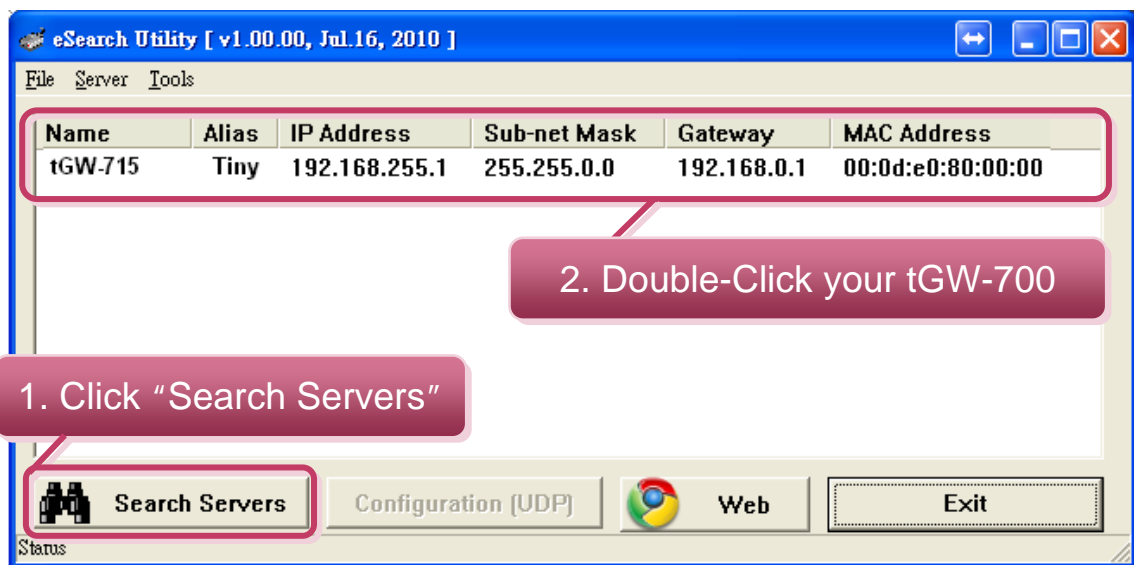


3. Contact your Network Administrator to obtain the correct network configuration information such as **IP/Mask/Gateway**. Enter the network settings and then click “**OK**”. The tGW-700 will use the new settings within 2 seconds.

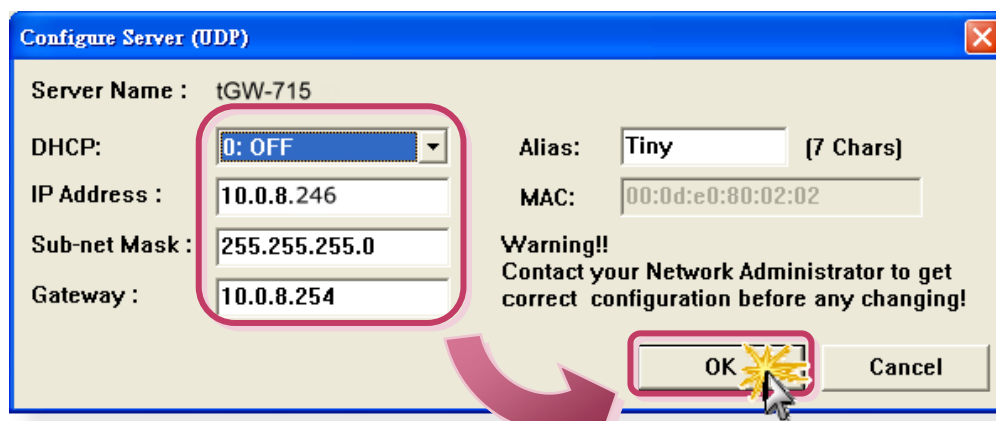


Step 4: Testing your tGW-700

4. Wiring to the Modbus device (ex: M-7055D, optional) with your tGW-700 (RS-485 bus).
For detailed RS-232/422/485 wiring information, refer to Section **2.7 Wiring Note**.

■ RS-232 Wiring:

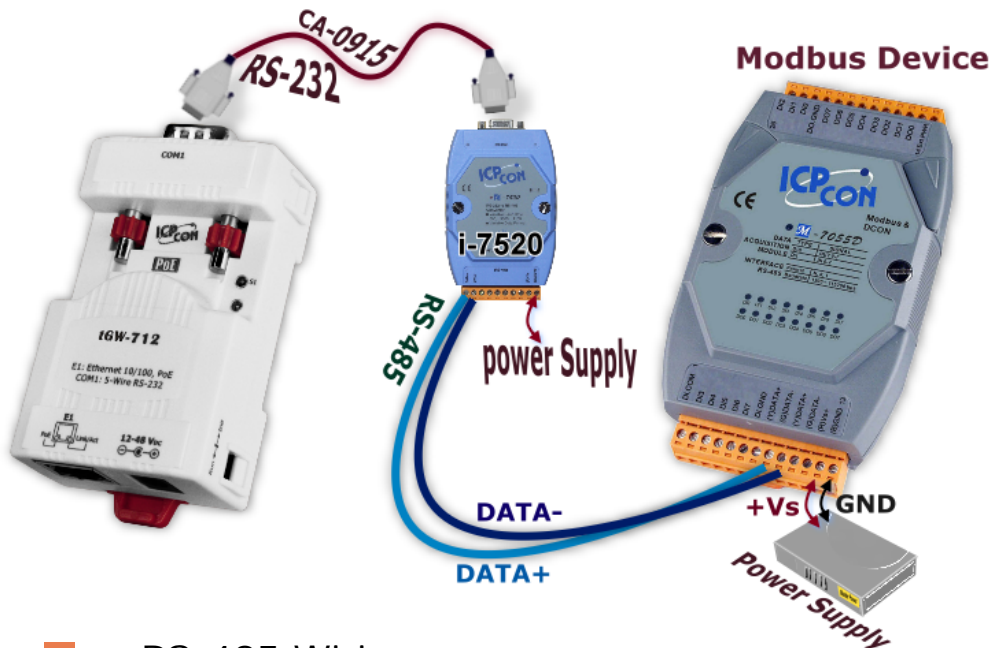


■ RS-485 Wiring:

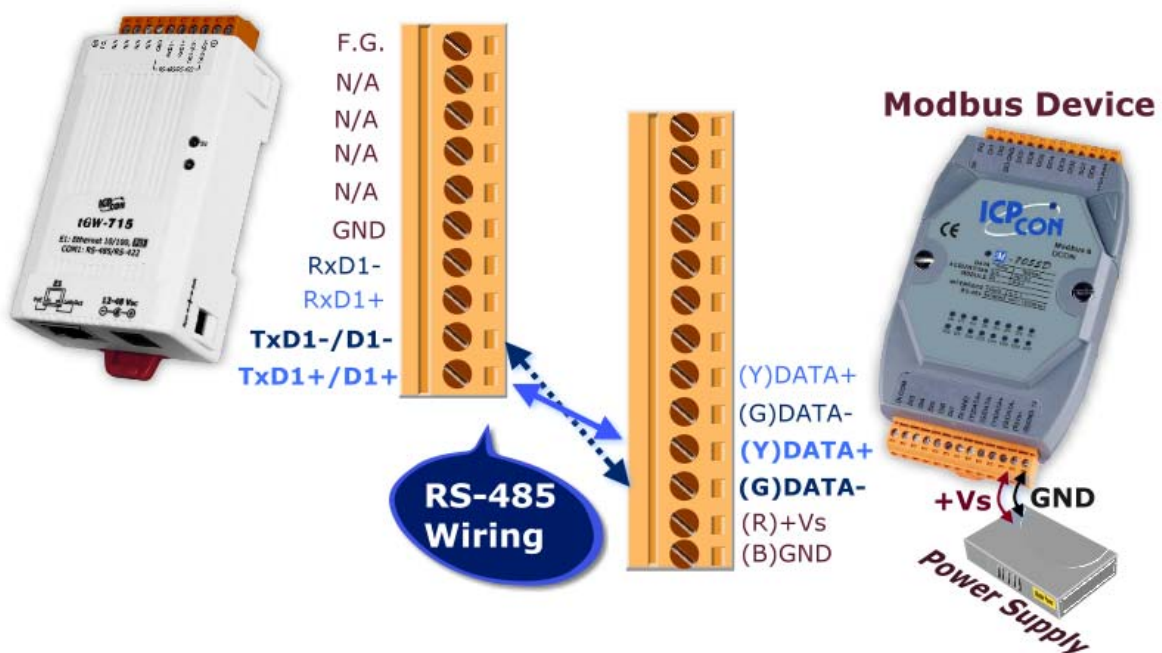


5. Enter the URL address of tGW-715 in the browser, or click the **“Web”** button on the eSearch Utility.



6. Enter the password (**default: admin**) in the login password field, and then click the **“Submit”** button to enter the configuration web page.

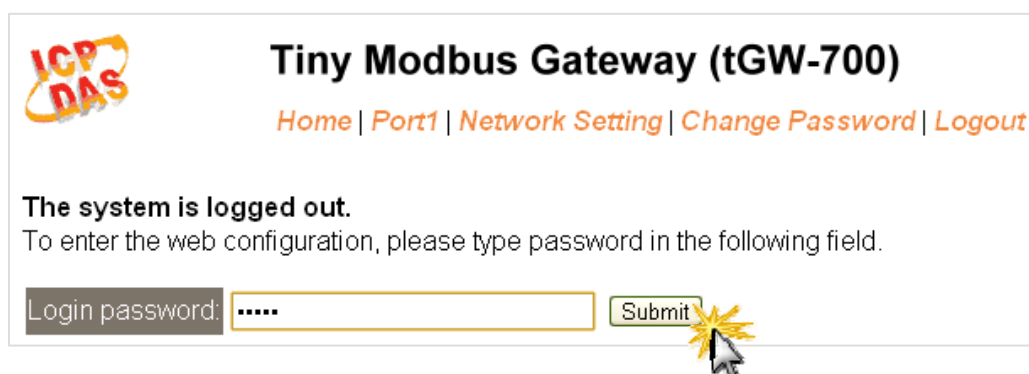


7. Select the **“Modbus RTU or Modbus ASCII”** option from the Modbus protocol that is used by the attached Modbus devices. **Note: Only one protocol can be used in a serial port.**

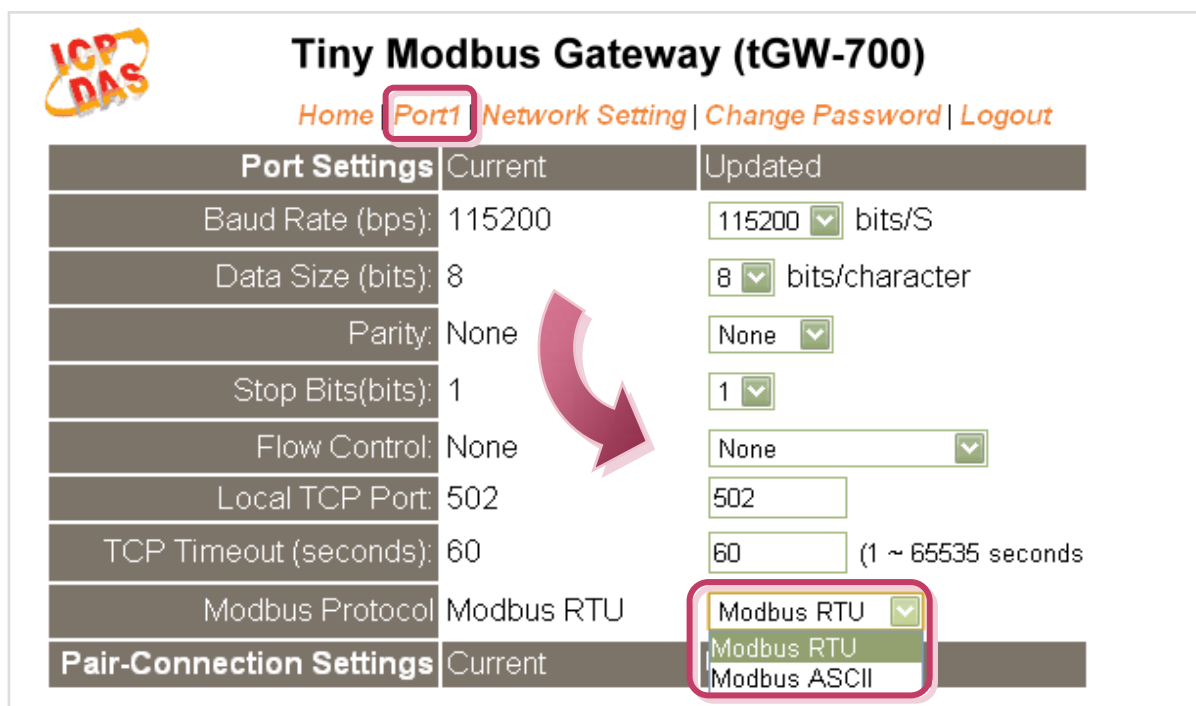


8. Double click the Modbus Utility shortcut on the desktop, and then click the “**Modbus/TCP**” button.



9. Click on the “**Client tools**” >> “**Modbus/TCP Client**”.

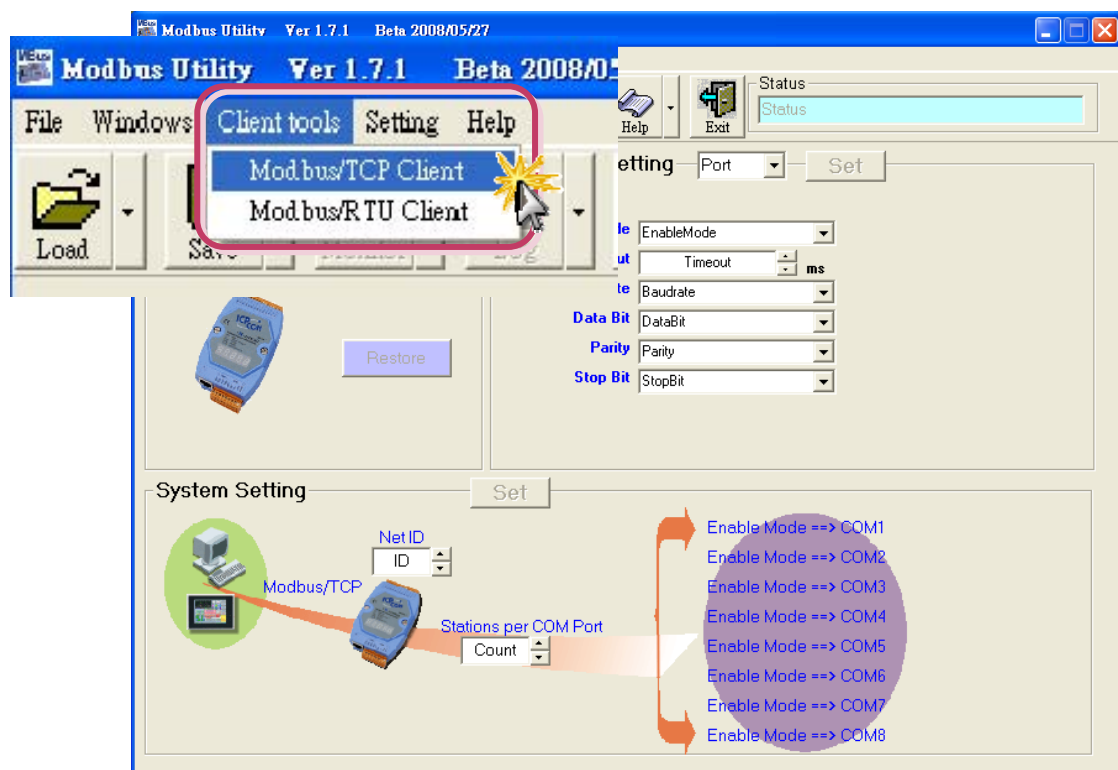


10. Enter the IP address of tGW-700 and then click **"Connect"** button to connect the tGW-700.

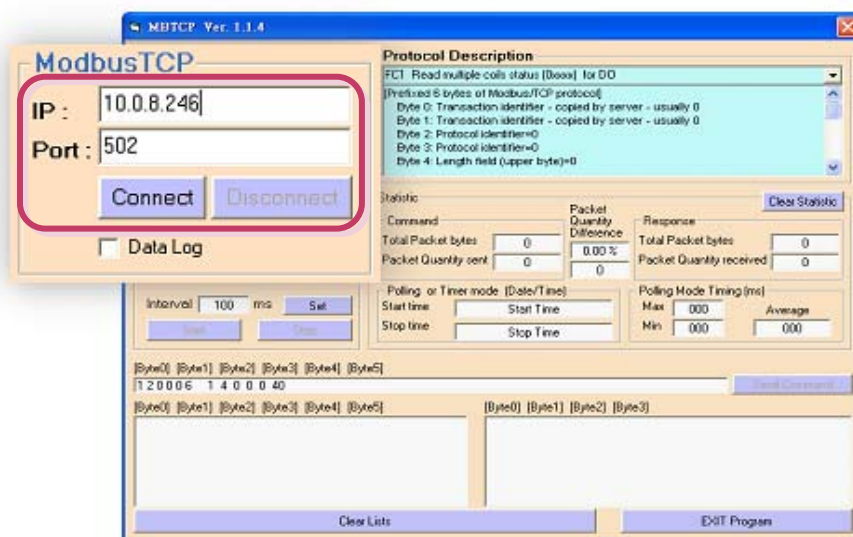

11. Refer to the field **"Protocol Description"** at the top right of the program. You can send a request command and confirm the response is correct.


(Ex: If M-7000 Modbus device ID = 1, you send "1 2 0 0 0 6 1 2 0 0 0 4" for reading D/I value, you may receive response "1 2 0 0 0 4 1 2 1 0")

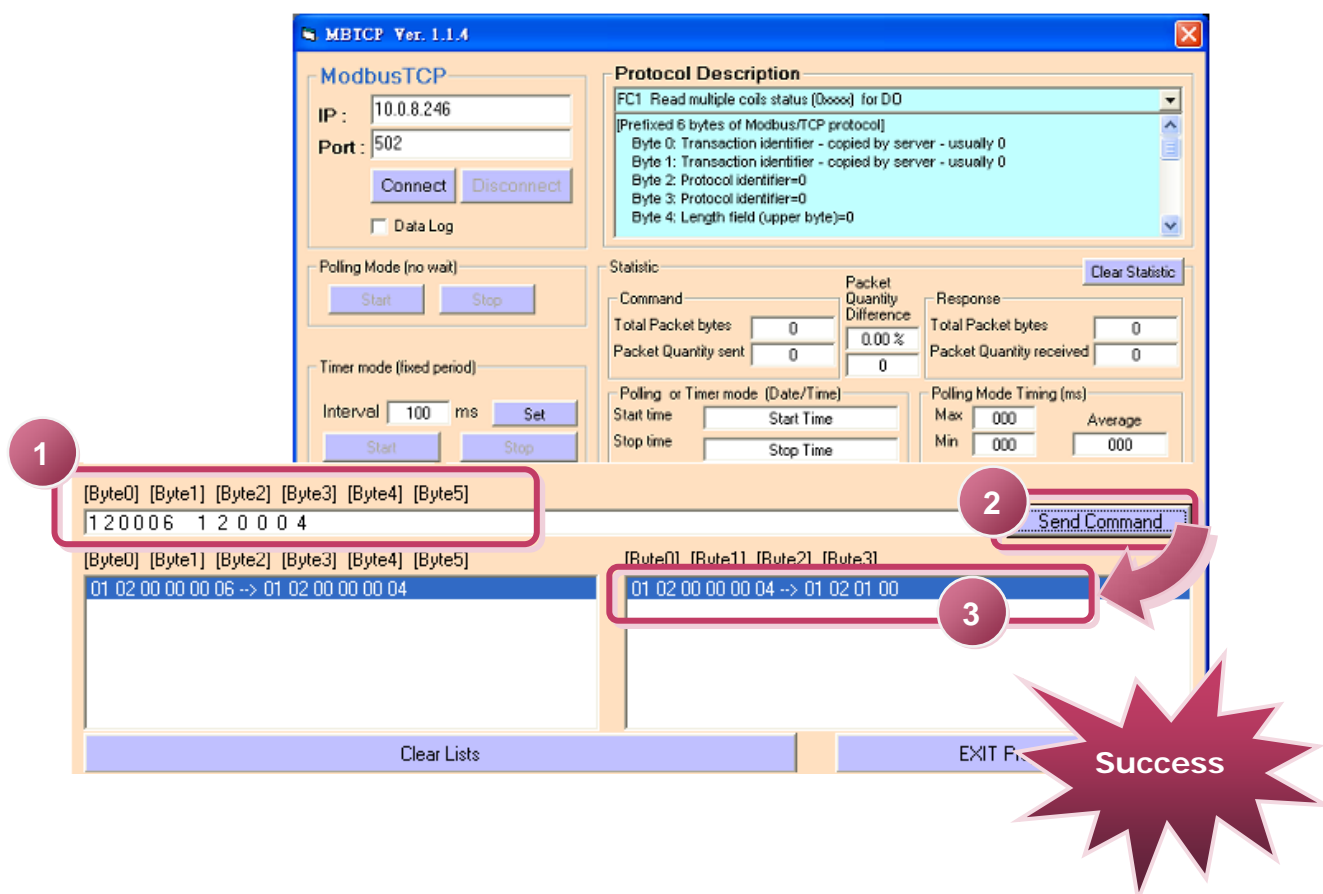


4. Typical Applications for the tGW-700

4.1 Modbus Gateway

The tGW-700 module is a Modbus TCP/UDP to RTU/ASCII gateway that enables a Modbus TCP/UDP host to communicate with serial Modbus RTU/ASCII devices through an Ethernet network, and eliminates the cable length limitation of legacy serial communication devices.

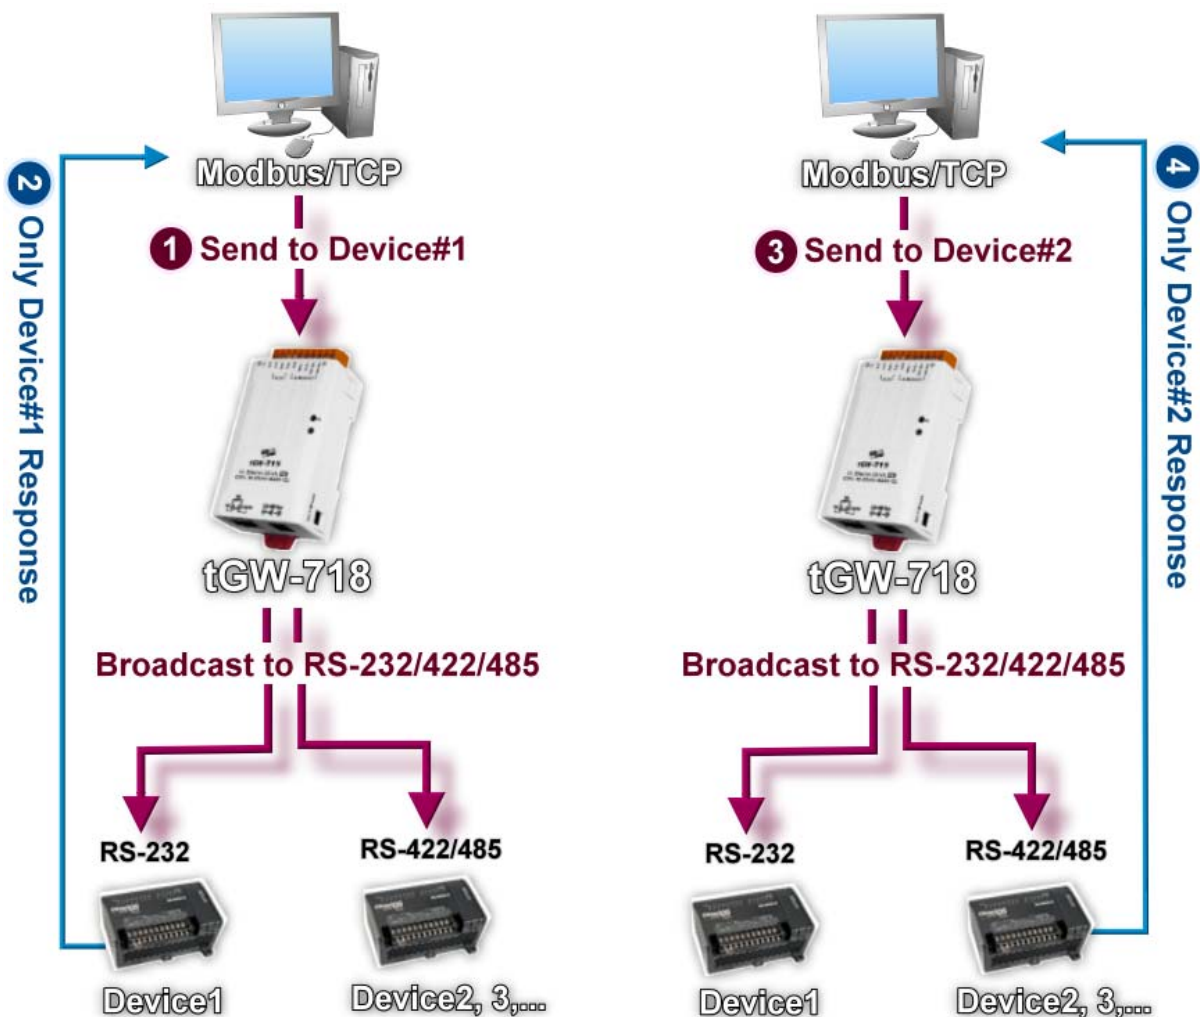

4.2 Pair-Connection Applications

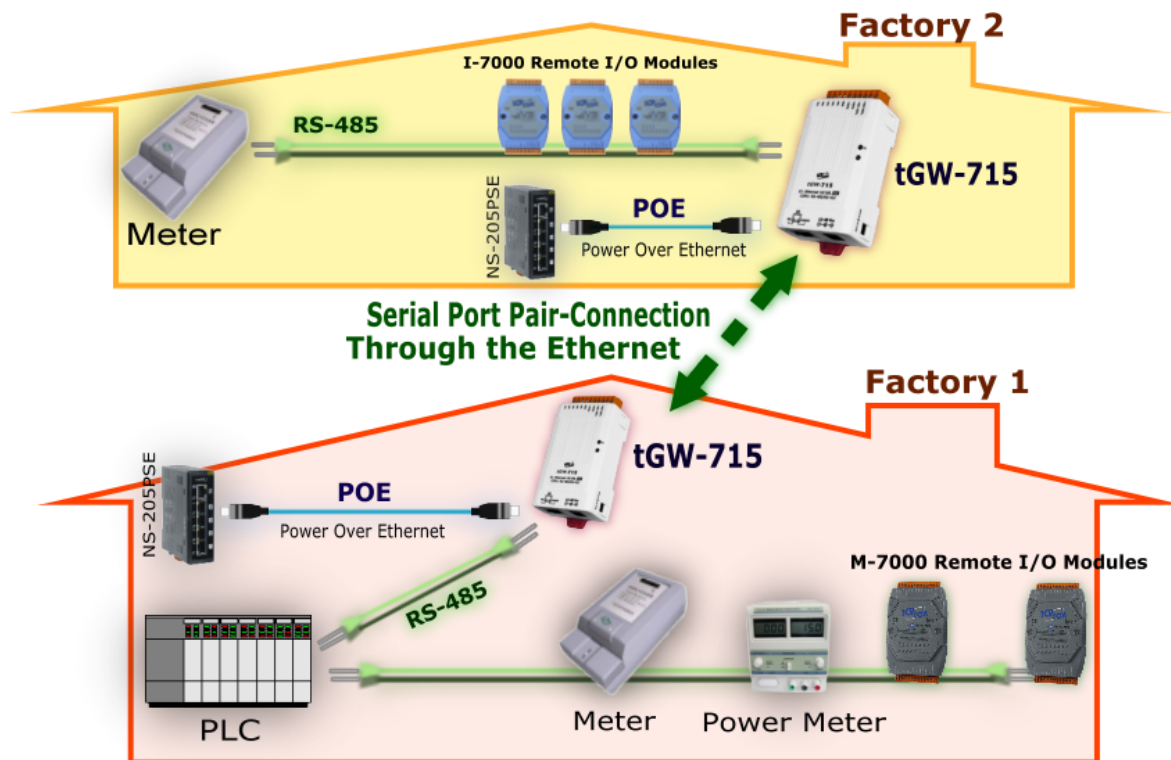

The tGW-700 device servers can be used to create a pair-connection application (as well as serial-bridge or serial-tunnel), and then route data between two serial devices via TCP/IP, which is useful when connecting mainframe computers, servers or other serial devices that do not themselves have Ethernet capability.


For example:

Item	Model Name	Configuration IP Address
tGW-700 #1	tGW-715	10.0.8.100
tGW-700 #2	tGW-715	10.0.8.246

Step 1: Connecting to a network, PC and Power


1. Confirm that the tGW-700 modules are functioning correctly. Refer to Section **3-1 Connecting the power and Host PC** for more details.
2. Use a i-7520 module to connect COM1 of the PC to COM1 of the tGW-700 #1. For detailed RS-422/485 wiring information, refer to Section **2.7 Wiring Notes**.
(i-7520 Web site: http://www.icpdas.com/products/Remote_IO/i-7000/i-7520.htm)
3. Connect the Modbus device (Ex, M-7055D) with COM1 of the tGW-700 #2.
(M-7055D Web site: http://www.icpdas.com/products/Remote_IO/m-7000/m-7055d.htm)

For example of pair-connection test as follows:

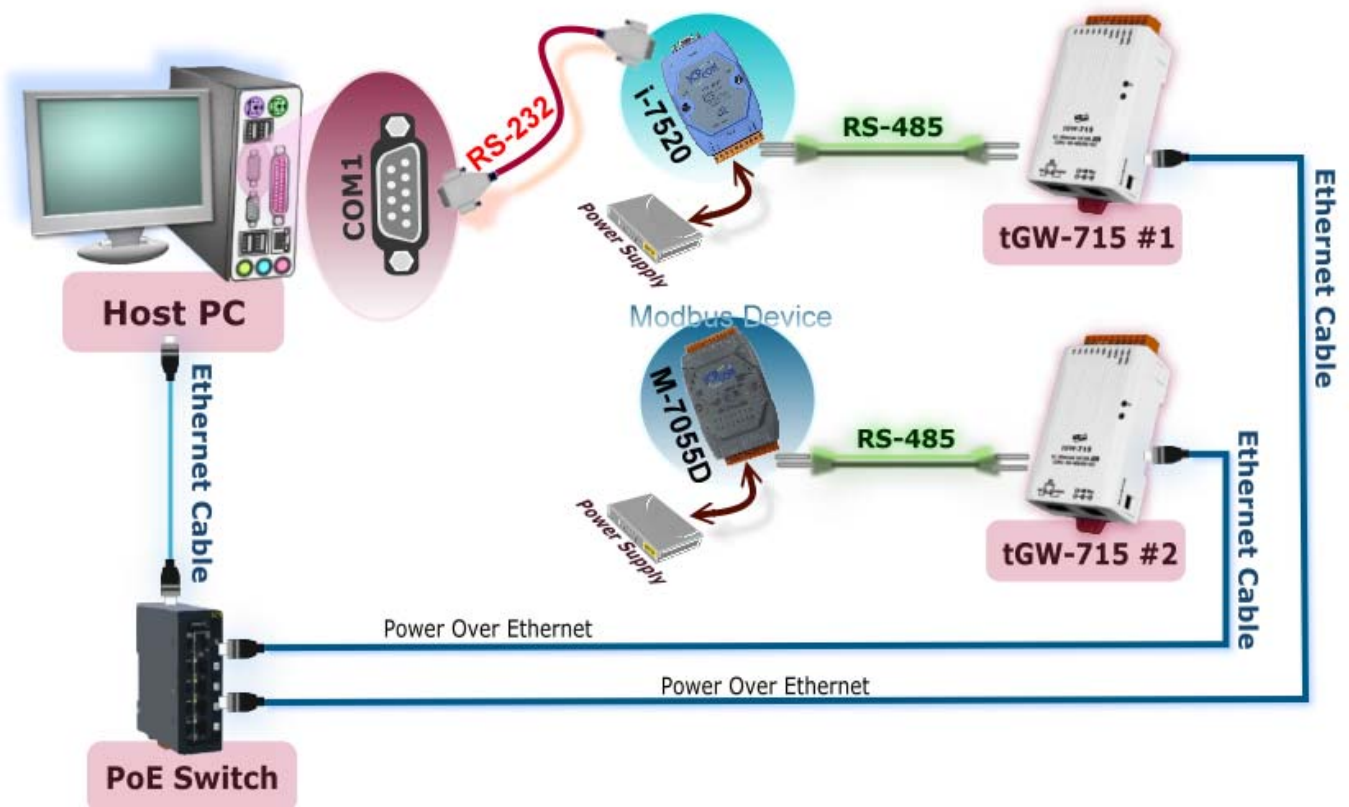

Step 2: Configuring Ethernet Settings

Contact your Network Administrator to obtain a correct and functioning network configuration (such as **IP/Mask/Gateway details**) for tGW-700 modules. Please also refer to Section **3-3 Search the tGW-700 on the Ethernet network**.

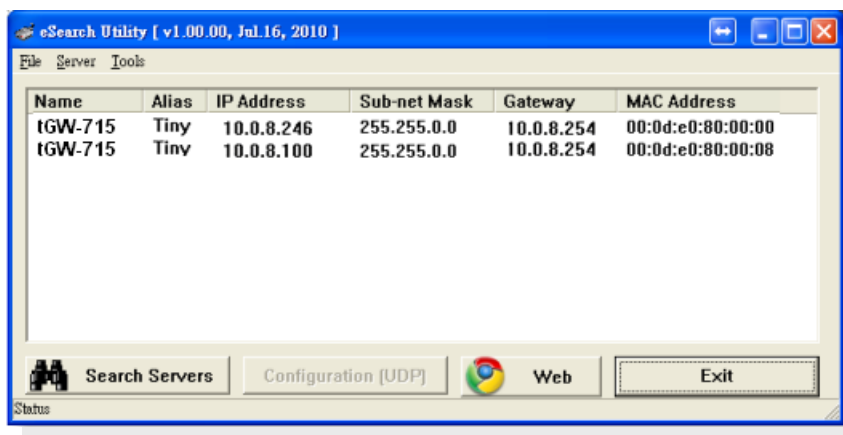

Step 3: Configuring Pair-Connection on tGW-700 #1 Web server

1. Select your first tGW-715 (tGW-700#1) and click web button on the eSearch Utility to launch the browser program for connecting to the web server.
2. Enter the password (**default: admin**) in the Login password field, and then click the “**Submit**” button to enter the configuration page.

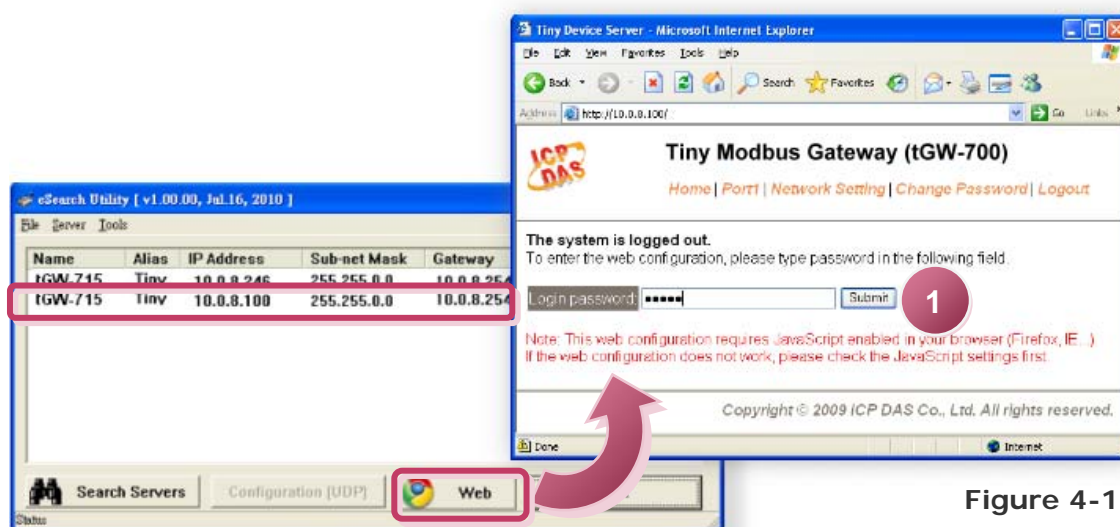


Figure 4-1

- Click the “**Port1**” link to enter the settings page.

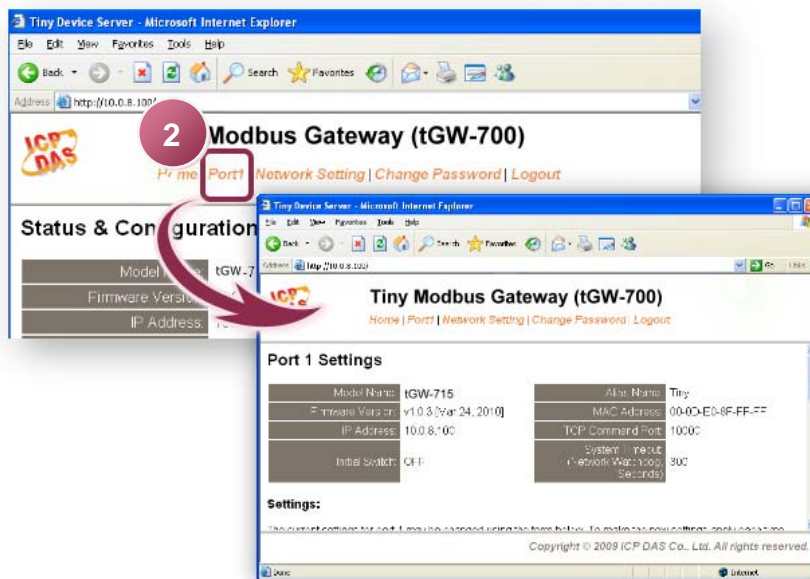


Figure 4-2

- Select the appropriate Baud Rate, Data Format and Modbus Protocol settings from the relevant drop down options, for example “**115200**” , “**8, None, 1**” and “**Modbus RTU**”.
- Select the “**Client**” option from the “**Server Mode**” drop down options and type the **IP address of the tGW-700 #2** in “**Remote Server IP**” field.
- Assign a **TCP port for the tGW-700 #2** in the “**Remote TCP Port**” field and then click the “**Submit**” button to complete the configuration.

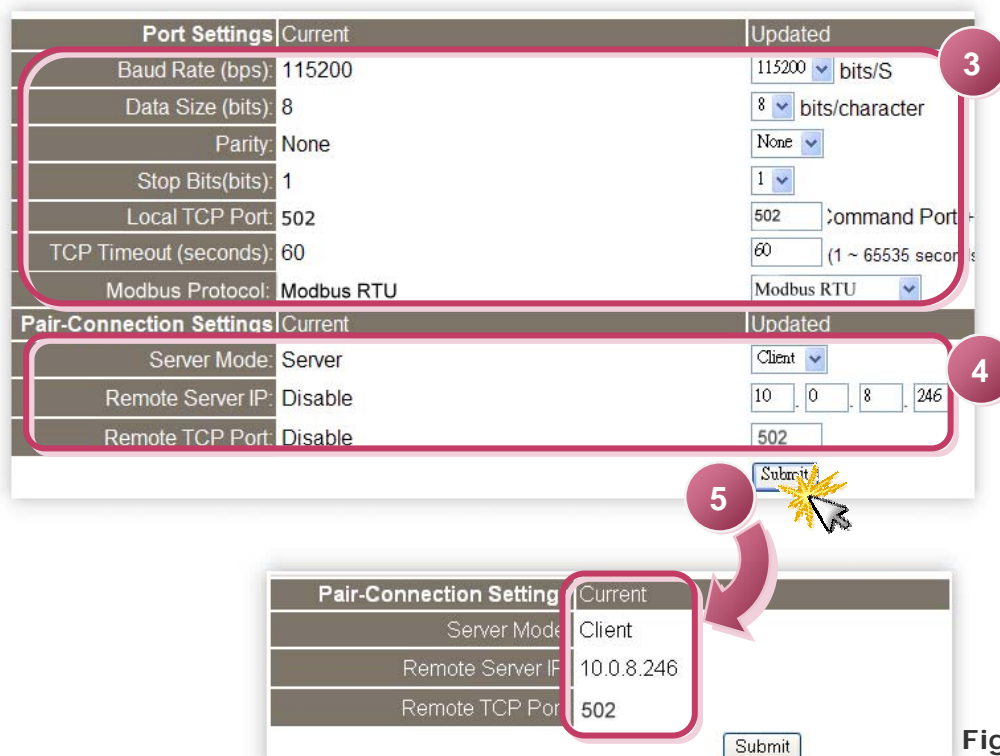


Figure 4-3

Step 4: Configuring Pair-Connection on tGW-700 #2 Web server

1. Enter the configuration page for the tGW-700 #2 web server.
2. Click the **“Port1”** link to enter the settings page of the tGW-700 #2.
3. Set the Baud Rate to **“115200”**, data format to **“8, None, 1”** and Modbus protocol to **“Modbus RTU”**. (Refer to Figures 4-1~4-3 for illustrations of how to perform the above steps.)
4. Select **“Server”** from the **“Server Mode”** drop down options and then click the **“Submit”** button to complete the configuration.

Pair-Connection Settings	Current	Updated
Server Mode:	Server	Server
Remote Server IP:	Disabled	10 . 0 . 8 . 244
Remote TCP Port:	Disabled	10001

Submit

Pair-Connection Settings Table:


Model	Port Settings (default)		Pair-connection settings		
	Baud Rate	Data Format	Server Mode	Remote Server IP	Remote TCP Port (default)
tGW-700 #1	115200	8N1	Client	IP Address of the tGW-700 #2	502
tGW-700 #2	115200	8N1	Server	-	-

Note


The Baud Rate and data format settings of the client and server (tGW-700 #1 and #2) depend on the COM ports of the PC (or the connected device). The serial port settings can be different between the tGW-700 #1 and #2.

Step 5: Testing Pair-Connection Function


1. Install the Modbus Utility, please refer to Section **3-2 Installing the Modbus Utility and eSearch Utility** for more details.
2. Double click the Modbus Utility shortcut on the desktop, and then click the “**Modbus/TCP**” button.

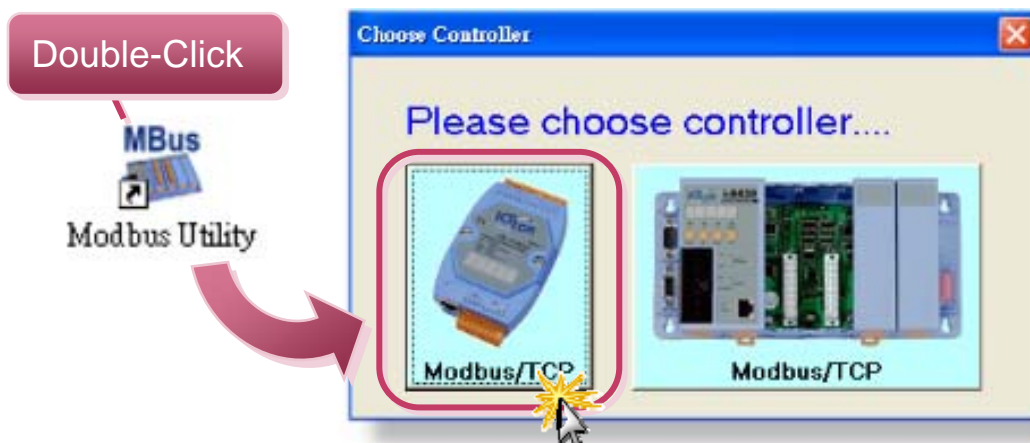

3. Click on the “**Client tools**” >> “**Modbus/RTU Client**”.

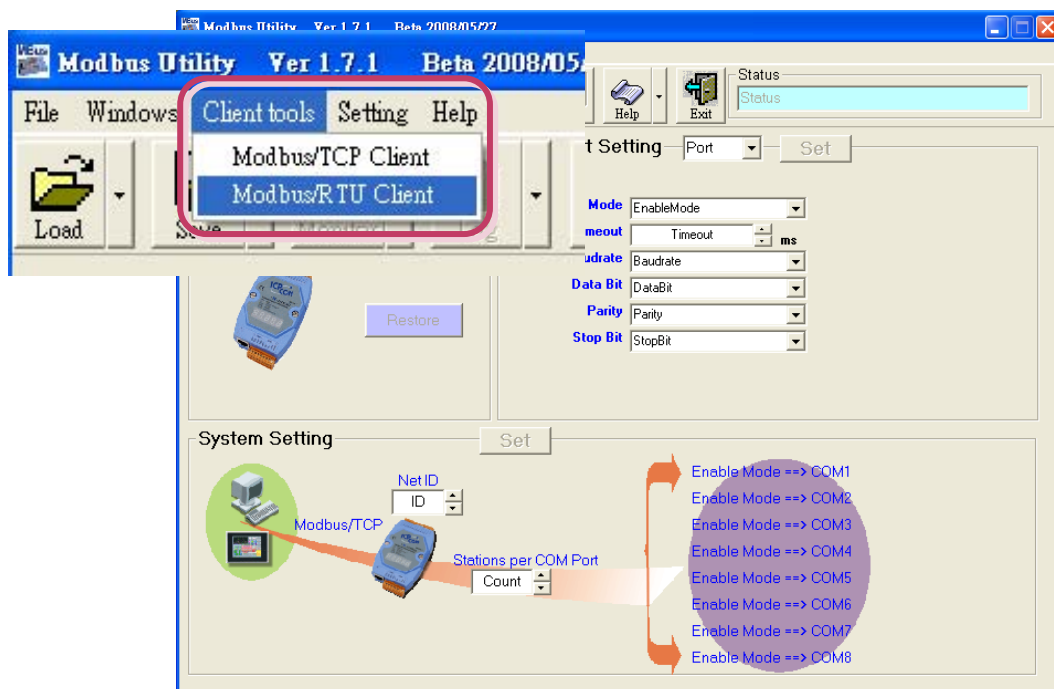


3. Select the COM port number and settings and then click “**Open**” button.

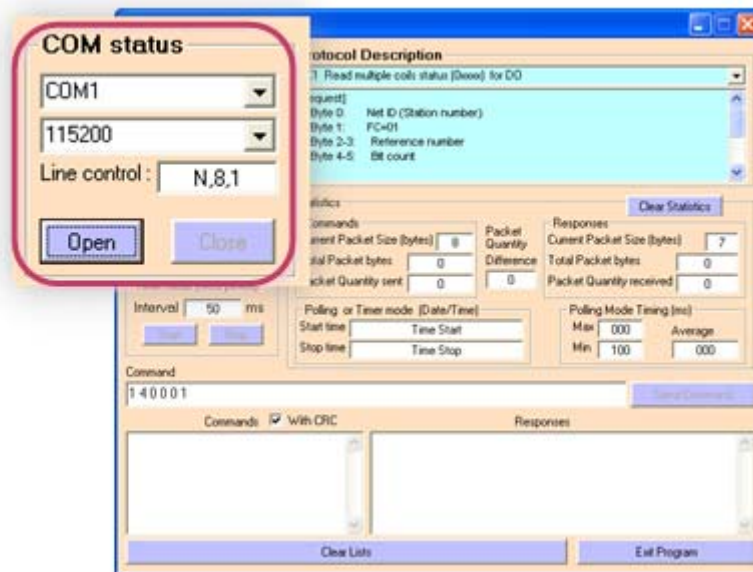

4. Refer to the field “**Protocol Description**” at the top right of the program. You can send a request command and confirm the response is correct.

(Ex: If the remote Modbus device ID = 1, you send “1 2 0 0 4” for reading D/I value, you may receive response “1 2 1 0 A1 88”) (“A1 88” is the CRC value.)

Note: The response is depending on the connected Modbus device.

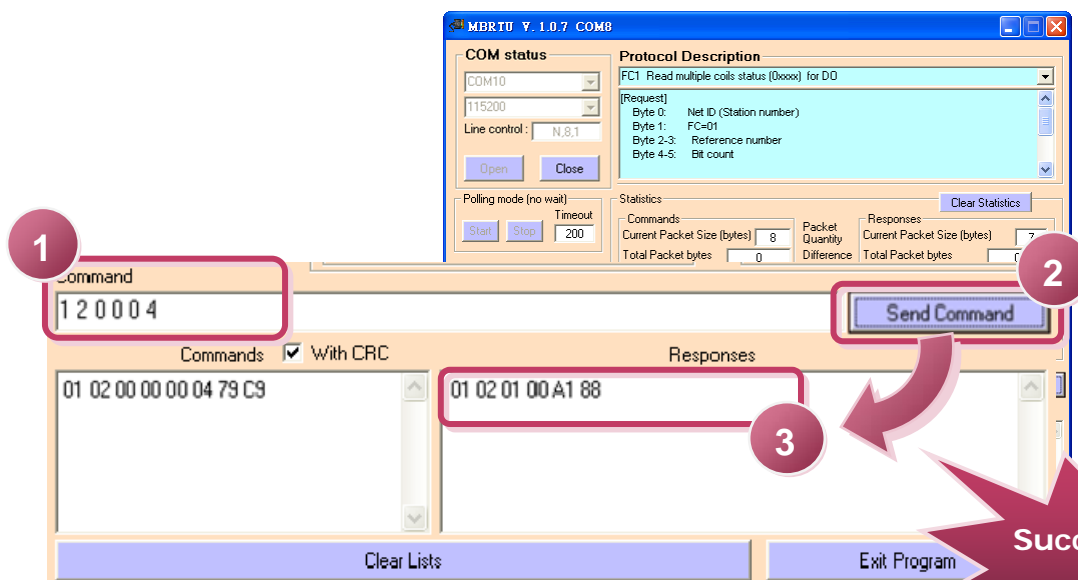

Note

The Baud Rate and Data Format depend on the serial port settings for the web configuration above.

5. Web Configuration

Once the tGW-700 module has been correctly configured and is functioning on the network normally, the configuration details can be retrieved or modified using either the eSearch Utility or a standard web browser.

5.1 Logging in to the tGW-700 Web server

You can log on to the tGW-700 web server from any computer that has Internet access.

Step 1: Open a browser

Mozilla Firefox, Google Chrome and Internet Explorer, for example are reliable and popular internet browsers that can be used to configure tGW-700 modules.



If using IE, disable the cache to prevent browser access errors. For detailed settings information refer to “**Appendix: FAQ 1**”.

Step 2: Type the URL address of the tGW-700

Make sure you have correctly configured the network settings for the tGW-700, or refer to Section **3 Setting up the tGW-700 module**.




Step 3: Enter the Password

After entering the IP address, the login dialog page will be displayed. Enter the password, and then click the “**Submit**” button to enter the configuration web page.


The factory default password is:

Item	Default
Login password	admin

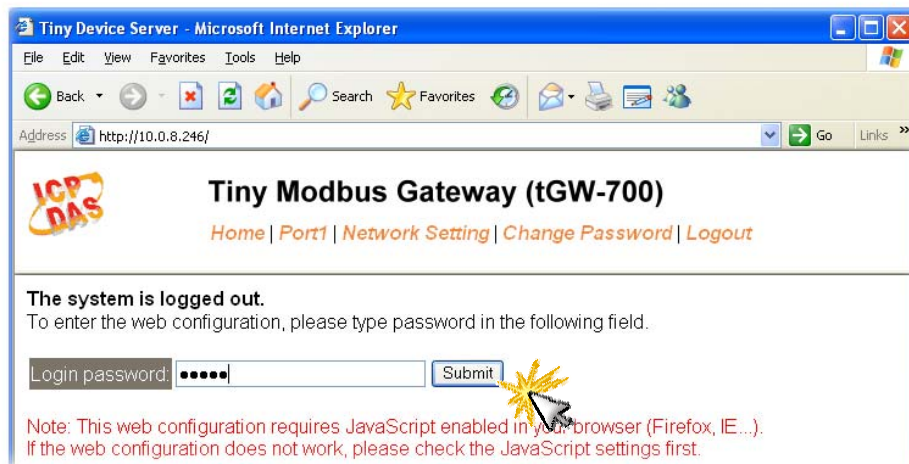


Step 4: Welcome to tGW-700 web server

After logging onto the tGW-700 web server, the main page will appear.

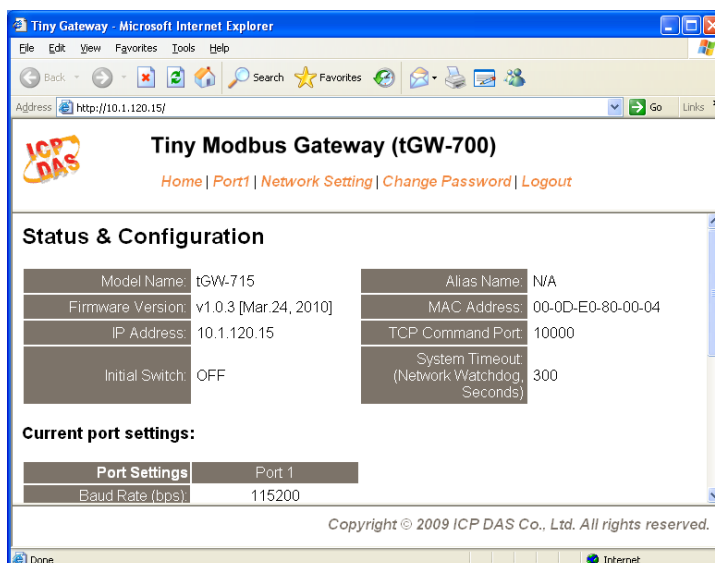

5.2 Home Page

The Home link connects to the main page, which contains two parts.

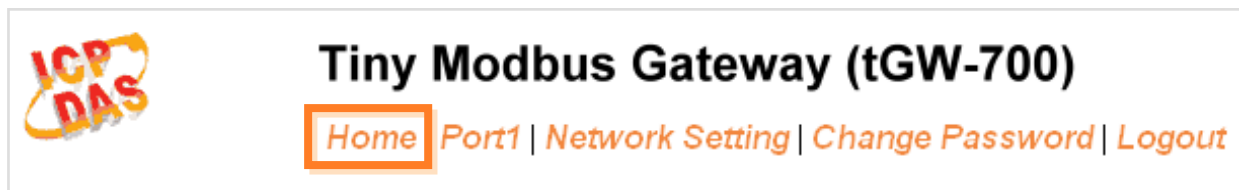

- The first part of this page provides basic information about the tGW-700 hardware and software.

Status & Configuration	
Model Name:	tGW-715
Firmware Version:	v1.0.3 [Mar.24, 2010]
IP Address:	10.1.120.15
Initial Switch:	OFF
Alias Name:	N/A
MAC Address:	00-0D-E0-80-00-04
TCP Command Port:	10000
System Timeout: (Network Watchdog, Seconds)	300

- The second part of this page provides the status of the port settings and pair-connection settings.

Current port settings:		
Port Settings	Current	Updated
Baud Rate (bps):	115200	115200 <input type="button" value="v"/> bits/S
Data Size (bits):	8	8 <input type="button" value="v"/> bits/character
Parity:	None	None <input type="button" value="v"/>
Stop Bits(bits):	1	1 <input type="button" value="v"/>
Local TCP Port:	502	502 (Default: 502)
TCP Timeout (seconds):	0	0 (1 ~ 65535 seconds, Default= 60, Disable= 0)
Modbus Protocol:	Modbus RTU	Modbus RTU <input type="button" value="v"/>

5.3 Network Setting



5.3.1 Network and Miscellaneous Settings

- Check the model name and the software information.

- The software information includes the following items:

Firmware Version, Model Name, IP Address, Initial Switch, MAC Address and System Timeout.

Network and Miscellaneous Settings

Model Name:	tGW-715	Alias Name:	Tiny
Firmware Version:	v1.0.6 [Jul.21, 2010]	MAC Address:	00-0D-E0-8F-FF-FF
IP Address:	10.0.8.246	TCP Port:	502
Initial Switch:	OFF	System Timeout: (Network Watchdog, Seconds)	300

After updating the tGW-700 firmware, you can check the version information on this page.

5.3.2 IP Address Selection

The **Address Type**, **Static IP Address**, **Subnet Mask** and **Default Gateway** items are the most important network settings and should always correspond to the LAN configuration. If they do not match, the tGW-700 module will not operate correctly. If the settings are changed while the module is operating, any linked connection currently in use will be lost and an error will occur.

IP Address Selection

Address Type:	Static IP <input type="button" value="v"/>
Static IP Address:	10 . 0 . 8 . 246
Subnet Mask:	255 . 255 . 255 . 0
Default Gateway:	10 . 0 . 8 . 254
MAC Address:	00-0D-B3-80-00-04 (Format: FF-FF-FF-FF-FF-FF)
<input type="button" value="Update Settings"/>	

Item Descriptions:

Item	Description
Address Type	Static IP: If you don't have a DHCP server in your network, you can configure the network settings manually. Please refer to the Section 5.3.2.1 Manually Configuration
	DHCP/AutoIP: Dynamic Host Configuration Protocol (DHCP) is a network application protocol that automatically assigns an IP address to each device. Please refer to Section 5.3.2.2 Dynamic Configuration
Static IP Address	Each tGW-700 on the network must have a unique IP address. This item used to assign specific IP address.
Subnet Mask	The subnet mask indicates which portion of the IP address is used to identify the local network or subnet.
Default Gateway	A gateway (or router) is a system that is used to connect an individual network with one or more additional networks.
MAC Address	The user-defined MAC address.
Update Settings	Click this button to save the new settings to the tGW-700.

- Network settings can be configured using either **dynamic configuration** or **manually configuration**, as per the following instructions:

5.3.2.1 Manual Configuration

When using manual configuration, you have to assign all the network settings in the following manner:

Step 1: Select “**Static IP**” as the address type

Step 2: Enter the appropriate **network settings**

Step 3: Click the “**Update Settings**” button to finish the configuration

IP Address Selection				
Address Type:	Static IP Step1			
Static IP Address:	10	0	8	246 Step2
Subnet Mask:	255	255	255	0
Default Gateway:	10	0	8	254
MAC Address:	00-0D-B0-80-00-04 (Format: FF-FF-FF-FF-FF-FF)			
				Update Settings Step3

5.3.2.2 Dynamic Configuration

Dynamic configuration is very easy to perform. If you have a DHCP server, the network address can be dynamically configured in the following manner:

Step 1: Select “**DHCP/AutoIP**” as the address type

Step 2: Click the “**Update Settings**” button to finish configuration

Address Type:	DHCP/AutoIP Step1			
Static IP Address:	10	0	8	246
Subnet Mask:	255	255	255	0
Default Gateway:	10	0	8	254
MAC Address:	00-0D-B0-80-00-04 (Format: FF-FF-FF-FF-FF-FF)			
				Update Settings Step2

5.3.3 General Configuration Settings

The General Configuration Settings provides functions allowing items such as the Alias Name, System Timeout value, and Auto-logout value to be configured.

General Configuration Settings

Alias Name:	<input type="text" value="Tiny"/>	(Max. 18 chars)
System Timeout (Network Watchdog)	<input type="text" value="300"/>	(30 ~ 65535 seconds, Default= 0, Disable= 0)
Web Auto-logout:	<input type="text" value="10"/>	(1 ~ 65535 minutes, Default= 10, Disable= 0)
<input type="button" value="Update Settings"/>		

■ Item Descriptions:

Item	Description	Default
Alias Name	Each tGW-700 can be allocated a unique Alias name so that it can be identified the network.	Tiny
System Timeout (Network Watchdog)	If no network communication occurs for a certain period, the system will be rebooted based on the configured system timeout value. Settings range: 30 ~ 65535 (seconds); Disabled = 0;	0
Web Auto-logout	If there is no action for a certain period in the web server, user account will be logout. Settings range: 1 ~ 65535 (minutes); Disabled = 0;	10
Update Settings	Click this button to save the new settings to the tGW-700.	


5.3.4 Restore Factory Defaults

- To reset the settings to their factory default, follow these steps:

Step 1: Click the “**Restore Defaults**” button to reset the configuration.

Step 2: Click the “**OK**” button in the message dialog box.


Step 3: Check whether the tGW-700 is reset to factory default settings for use with the eSearch Utility. Refer to the Section 3 **Setting up the tGW-700 Module**

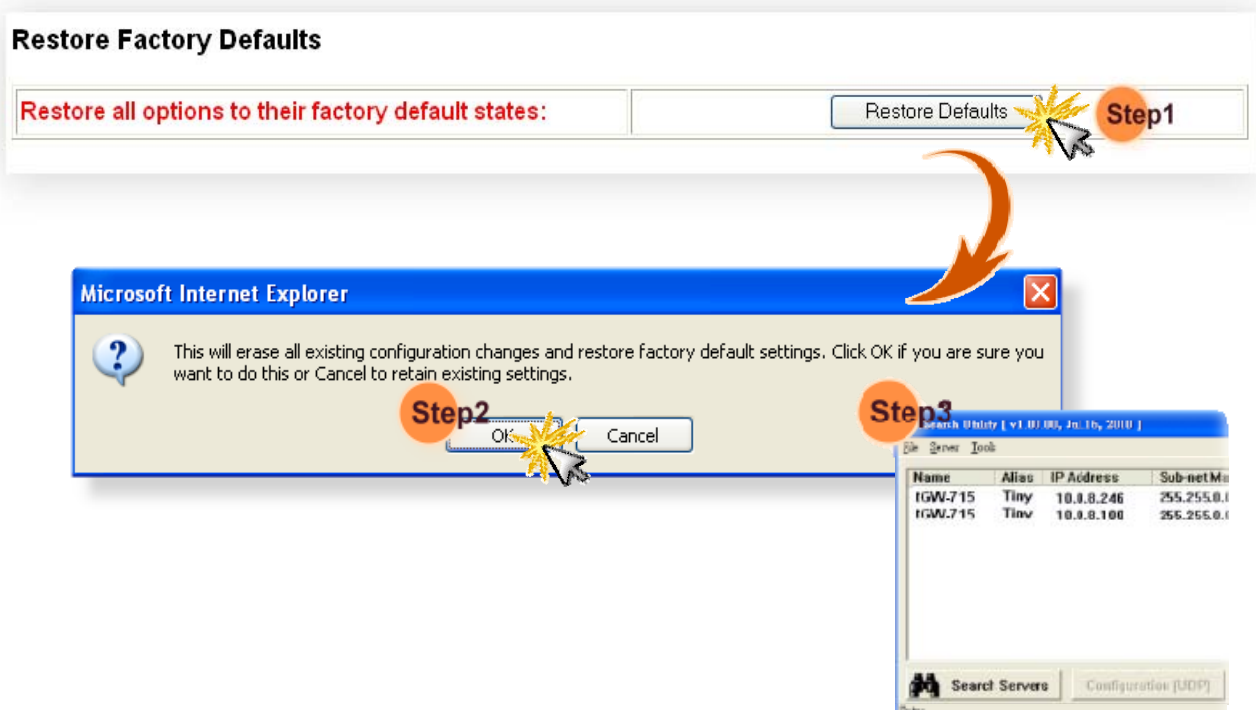

- Default Settings:

Item	Factory Default Settings
IP	192.168.255.1
Gateway	192.168.0.1
Mask	255.255.0.0

5.4 Serial Port Settings



Tiny Modbus Gateway (tGW-700)

[Home](#) **Port1** [Network Setting](#) | [Change Password](#) | [Logout](#)

5.4.1 Port1 Settings

Check the tGW-700 hardware and software information.

Port 1 Settings

Model Name:	tGW-715	Alias Name:	Tiny
Firmware Version:	v1.0.3 [Aug. 12, 2010]	MAC Address:	00-0D-E0-80-00-04
IP Address:	10.1.120.15	TCP Port Timeout: (Socket Watchdog, Seconds):	0
Initial Switch:	OFF	System Timeout: (Network Watchdog, Seconds)	0

5.4.2 Port Settings

The port settings provide the following functions:

Port Settings	Current	Updated
Baud Rate (bps):	115200	<input type="text" value="115200"/> bits/S
Data Size (bits):	8	<input type="text" value="8"/> bits/character
Parity:	None	<input type="text" value="None"/>
Stop Bits(bits):	1	<input type="text" value="1"/>
Local TCP Port:	502	<input type="text" value="502"/> (Default: 502)
TCP Timeout (seconds):	0	<input type="text" value="0"/> (1 ~ 65535 seconds, Default= 60, Disable= 0)
Modbus Protocol	Modbus RTU	<input type="text" value="Modbus RTU"/>

■ Item Descriptions:

Item	Description	Default
Baud Rate (bps)	Sets the Bard Rate for the COM ports.	115200
Data Size (bits)	Sets the Data Size for the COM ports.	8
Parity	Sets the Parity for the COM ports. The tGW-700 does not support the Mark and Space functions.	None
Stop Bits (bits)	Sets the Stop Bits of the COM ports.	1
Local TCP Port	Modbus TCP port	502
TCP Timeout(seconds)	If the Local TCP port does not receive any data via the TCP/IP for a certain period, the tGW-700 will disconnect the socket based on the TCP timeout value. Settings range: 1 ~ 65535 (seconds); Disabled = 0;	180
Modbus Protocol	Modbus RTU or Modbus ASCII	Modbus RTU

5.4.3 Pair-Connection Settings

The pair-connection provides the following functions:


Pair-Connection Settings	Current	Updated
Server Mode:	Server	Server <input type="button" value="v"/>
Remote Server IP:	Disabled	10 . 0 . 8 . 244
Remote TCP Port:	Disabled	10001

■ Item Descriptions:

Item	Description	
Server Mode	Server	Client
Remote Server IP	Disabled	IP address of the remote device
Remote TCP Port	Disabled	TCP Port number of the remote device
Submit	Click this button to save the new settings to the tGW-700.	

The more detailed information regarding pair-connection applications settings, please refer to the Section **4.2 Pair-Connection Applications**

5.5 Change Password

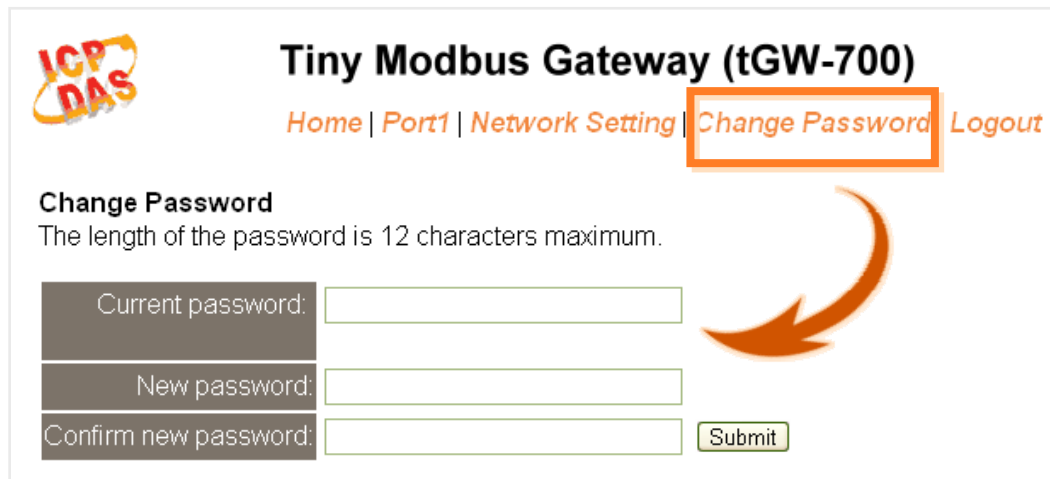


■ Item Descriptions:

Item	Description
Current password	Enter the old password (default is admin)
New password	Enter the new password
Confirm new password	Enter the new password again
Submit	Click this button to save the new settings to the tGW-700.

5.6 Logout

Click the “**Logout**” tag to log out from the system and return to the login page.

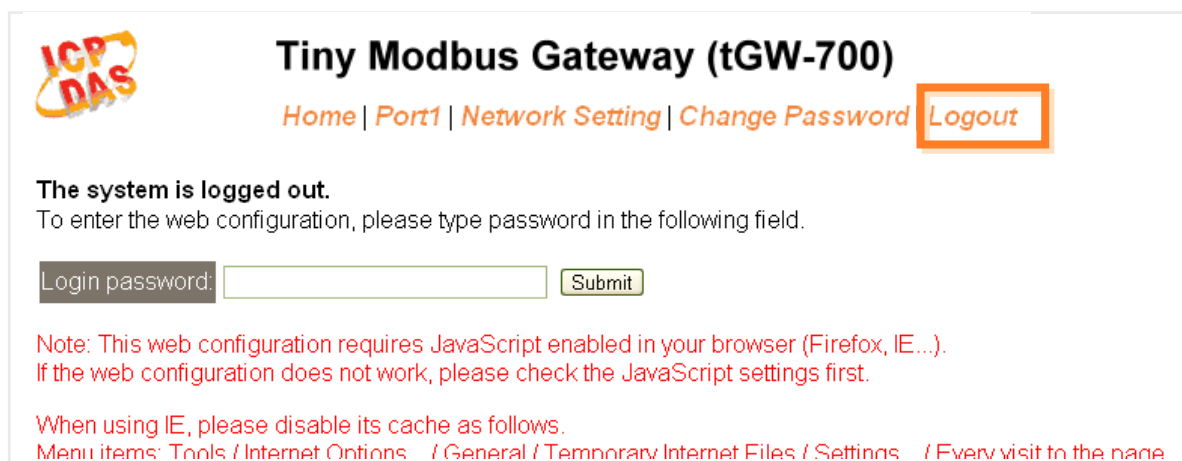

Appendix: Glossary

1. ARP (Address Resolution Protocol)

Consider two machines A and B that share a physical network. Each has an assigned IP address IP_A and IP_B , and a MAC address, MAC_A and MAC_B . The goal is to devise low-level software that hides MAC addresses and allows higher-level programs to work only with the IP addresses. Ultimately, however, communication must be carried out by the physical networks using whatever MAC address scheme the hardware supplies.

Suppose machine A wants to send a packet to machine B across a physical network to which they are both attached, but A only has the Internet address for B, IP_B . The question arises: how does A map that address to the MAC address for B, MAC_B ?

ARP provides a method of dynamically mapping 32-bit IP address to the corresponding 48-bit MAC address. The term dynamic is used since it happens automatically and is normally not a concern for either the application user or the system administrator.

2. Clients and Servers

The client-server paradigm uses the direction of initiation to categorize whether a program is a client or server. In general, an application program that initiates peer-to-peer communication is called a client. End users usually invoke client programs when they use network services.

Most client programs consist of conventional application program development tools. Each time a client program is executed, it contacts a server, sends a request and waits for a response. When the response arrives, the client program continues processing. Client programs are often easier to develop than servers, and usually require no special system privileges to operate.

By comparison, a server is any program that waits for incoming requests from a client program. The server receives a request from a client, performs the necessary computation and returns the result to the client.

3. Ethernet

The term Ethernet generally refers to a standard published in 1982 by Digital Equipment Corp., Intel Corp. and Xerox Corp. Ethernet is the most popular physical layer local area network (LAN) technology today. Ethernet is a best-effort delivery system that uses CSMA/CD technology. It recognizes hosts using 48-bit MAC address.

4. Firmware

Firmware is an alterable program located or stored in the semi-permanent storage area, e.g., ROM, EEPROM, or Flash memory.

5. Gateway

Computers that interconnect two networks and pass packets from one to the other are called Internet Gateways or Internet Routers. Gateways route packets that are based on the destination network, not on the destination host.

6. ICMP (Internet Control Messages Protocol)

No system works correctly all the time. ICMP provides a method of communicating between the Internet Protocol software on one machine and the Internet Protocol software on another. It allows gateways to send error or control messages to other gateways or allows a host to know what is wrong with the network communication.

7. Internet

Physically, the Internet is a collection of packet switching networks interconnected by gateways that together with TCP/IP protocol, allows them to perform logically as a single, large and virtual network. The Internet recognizes hosts using 32-bit IP address.

8. IP (Internet Protocol) address

Every interface on the Internet must have a unique IP address (also called an Internet address). These addresses are 32-bit numbers. They are normally written as four decimal numbers, one for each byte of the address such as "192.168.41.1". This is called dotted-decimal notation.

9. MAC (Media Access Control) address

To allow a computer to determine which packets are meant for it, each computer attached to an Ethernet network is assigned a 48-bit integer known as its MAC address (also called an Ethernet address, hardware address or physical address). They are normally written as eight hexadecimal numbers such as “00:71:88:af:12:3e:0f:01”. Ethernet hardware manufacturers purchase blocks of MAC addresses and assign them in sequence as they manufacture the Ethernet interface hardware. Thus, no two hardware interfaces have the same MAC address.

10. Packet


A packet is the unit of data sent across a physical network. It consists of a series of bits containing data and control information, including the source and the destination node (host) address, and is formatted for transmission from one node to another.

11. Ping

Ping sends an ICMP echo request message to a host, expecting an ICMP echo reply to be returned. Normally, if a host cannot be pinged, you won't be able to use Telnet or FTP to connect to the host. Conversely, if Telnet or FTP cannot be used to connect to a host, Ping is often the starting point to determine what the problem is.

12. RARP (Reverse Address Resolution Protocol)

RARP provides a method of dynamically mapping 48-bit MAC address to the corresponding 32-bit IP address.

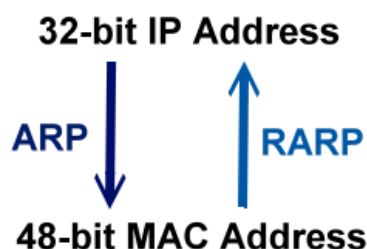

13. Socket

Each TCP segment contains the source and destination port number that can be used to identify the sending and receiving application. These two values, along with the source and destination IP address in the IP header, uniquely identify each connection.

The combination of an IP address and a port number is called a socket.

14. Subnet Mask

The Subnet mask is often simply called the mask. Given its own IP address and its subnet mask, a host can determine if a TCP/IP packet is destined for a host that is (1) on its own subnet, or (2) on a different network. If (1), the packet will be delivered directly; otherwise it, will be delivered via a gateway or router.

15. TCP (Transmission Control Protocol)

TCP provides a reliable flow of data between two hosts and is associated with tasks such as dividing the data passed to it from applications into appropriately sized chunks for the network layer below, acknowledging received packets, setting timeouts to make certain that the other end acknowledges packets that are sent, and so on.

16. TCP/IP

The Transmission Control Protocol (TCP) and the Internet Protocol (IP) are the standard network protocols. They are almost always implemented and used together in a formation is known as TCP/IP. TCP/IP can be used to communicate across any set of interconnected networks.

17. UDP (User Datagram Protocol)


UDP provides a much simpler service to the application layer as it just sends packets of data from one host to the other, but there is no guarantee that the packets will reach the destination host.

Appendix: FAQ

1. How to avoid a browser access error that causes a blank page to be displayed when using IE.

Disable the IE cache in the following manner:


Step 1: Click **“Tools”** >> **“Internet Options...”**.

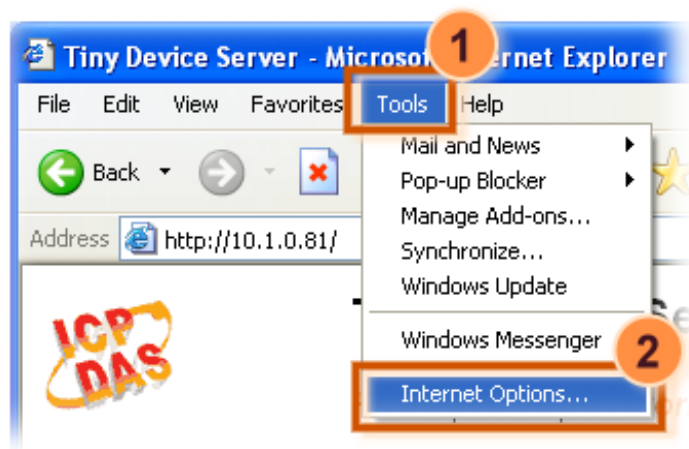

Step 2: Click the **“General”** tab and then click the **“Settings...”** button in the Temporary Internet files frame of the Internet Options dialog.




Step 3: Select the **“Every visit to the page”** option and then click the **“OK”** button in both the Settings dialog and the Internet Options dialog.

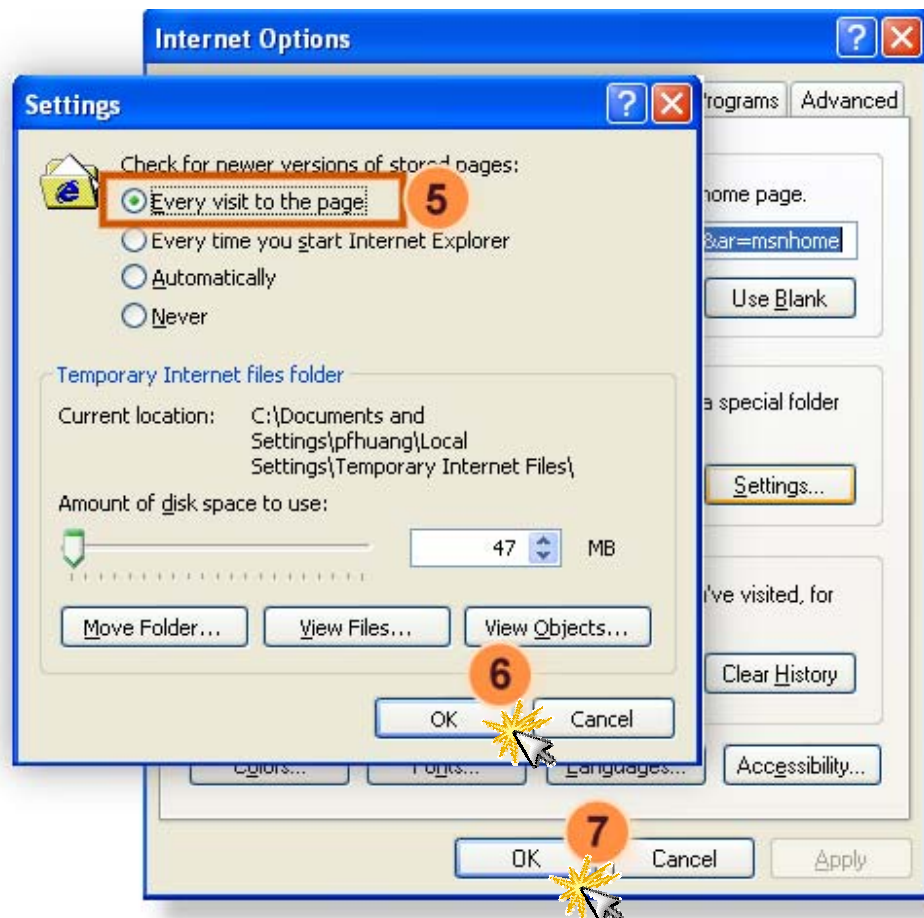

Step 4: Click the **“Refresh”** button or press F5 on your keyboard to refresh the tGW-700 web server or re-open IE.



2. How to access a remote tGW-700 that is located placed behind an NAT or a firewall.

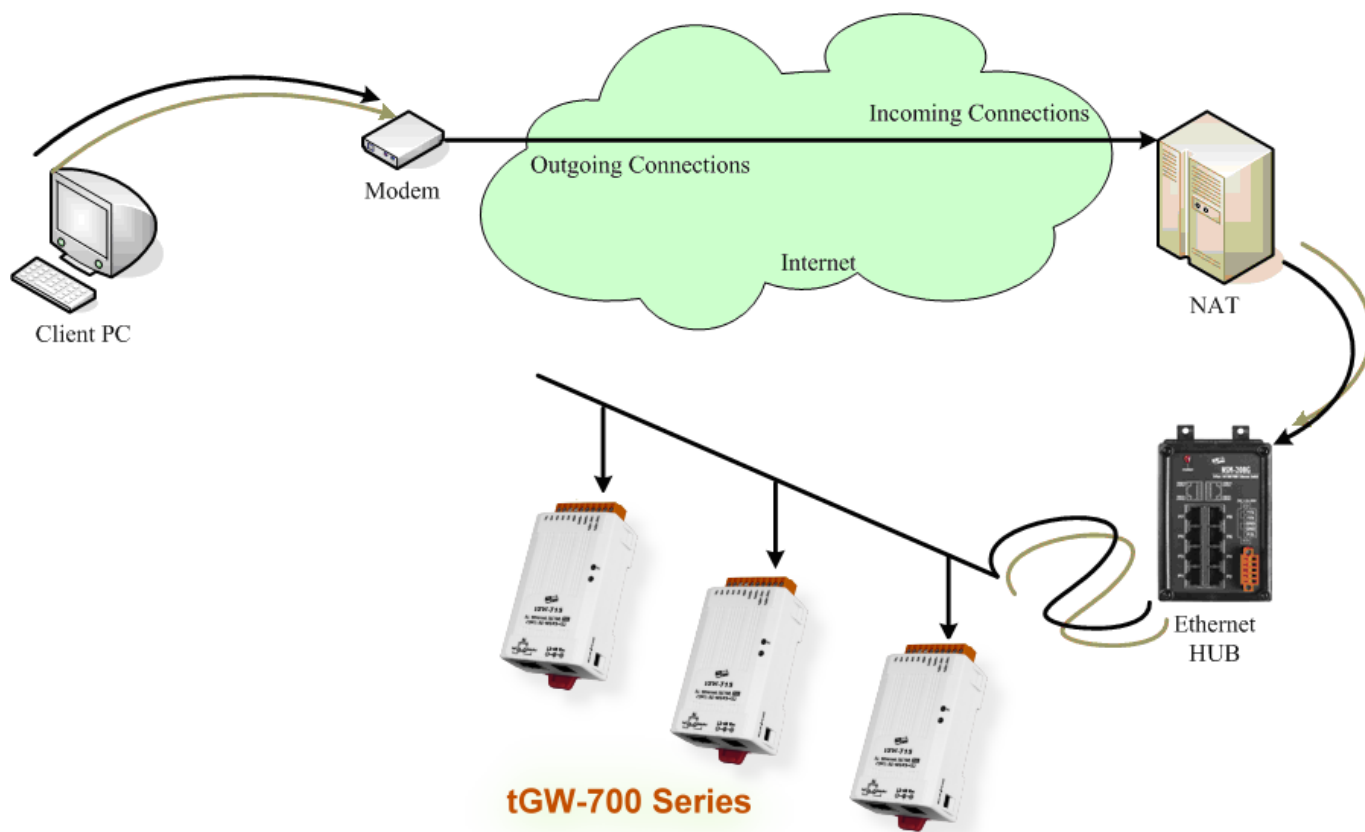

The **remote site must have an NAT** server (or a router supports NAT). NAT stands for Network Address Translator.

By using (configuring) the NAT server, **NAT can forward (bypass) all specified TCP port connections to specified tGW-700 devices.**

For example:

NAT: 502 maps to 192.168.1.101: 502

NAT: 512 maps to 192.168.1.102: 502

Please note, if your NAT (router) includes a built-in a firewall feature, you have to **configure the NAT to allow incoming TCP port connections**.

For example:

TCP port includes 502 and 512 of NAT.

In the SCADA/HMI (Modbus/TCP client) program, you have to access **tGW-700 by using NAT's address and NAT's TCP ports instead of tGW-700's settings**.

For example:

The first tGW-700, it's IP: Port should be NAT: 502.

The second tGW-700, it's IP: Port should be NAT: 512.

3. Why does the tGW-700 series module fail on a (public) Internet connection?

The default IP address of the tGW-700 series module is 192.168.255.1, which can be only used on a private Internet connection. A private network packet will not be routed via a (public) Internet connection, which is the reason why the tGW-700 series module fails on the Internet.


The IANA has reserved three address spaces for private internets (RFC1918).

10.0.0.0 - 10.255.255.255 (10/8 prefix)


172.16.0.0 - 172.31.255.255 (172.16/12 prefix)

192.168.0.0 - 192.168.255.255 (192.168/16 prefix)

However, tGW-700 series modules are to be operated on the Internet using a legal public IP address. This address can be obtained from your ISP or network administrator.

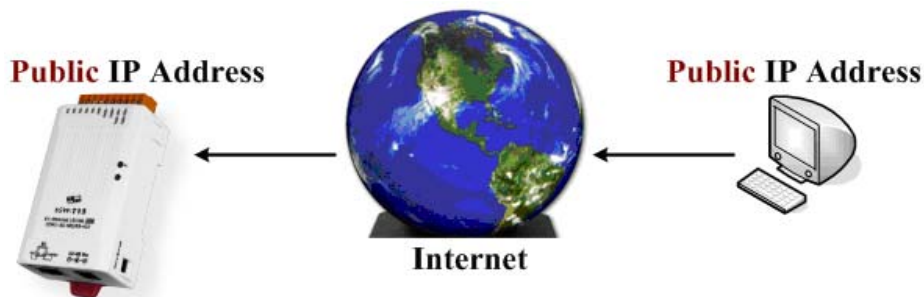

A private internet client may communicate with a public Internet server (tGW-700 series module) only if the NAT service for the client is available.

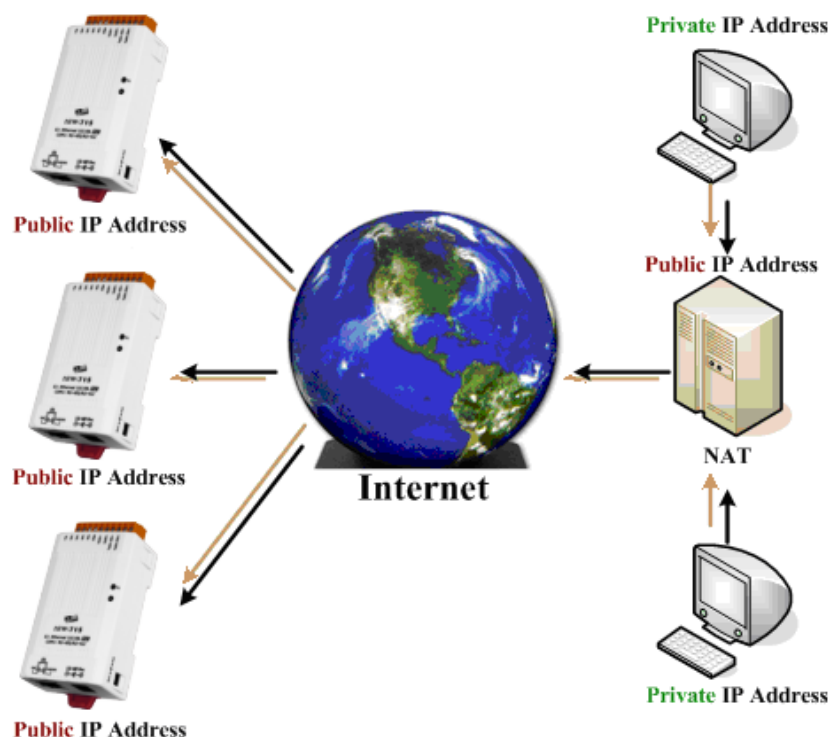

Note

IANA	Internet Assigned Numbers Authority
RFC	Request for Comments
ISP	Internet Service Providers
NAT	Network Address Translator



ICP DAS Web Site: <http://www.icpdas.com>
Contact Us (E-Mail): service@icpdas.com , service.icpdas@gmail.com